

# HEWLETT-PACKARD

Equip Yourself With The Professional Problem Solvers:

HP-41 Advanced Programmable Calculators and

HP-71 Handheld Computer





# HEWLETT-PACKARD

Tools You'll Find In The Professional Problem Solvers:

Surveyors, Scientists, Engineers, Accountants, and

Businessmen





**Top**—Week-end and professional sailors depend on the HP-41 and Navigation Pac to plan voyages.

**Center**—Surveyors take the HP-41 to the job site . . . wherever it is. The alphanumeric keyboard makes data entry easy, and continuous memory ensures that data is available when it's needed.

**Bottom**—Increase productivity, with the HP-71 Handheld Computer as the center of an HP-IL system.



# Table of Contents

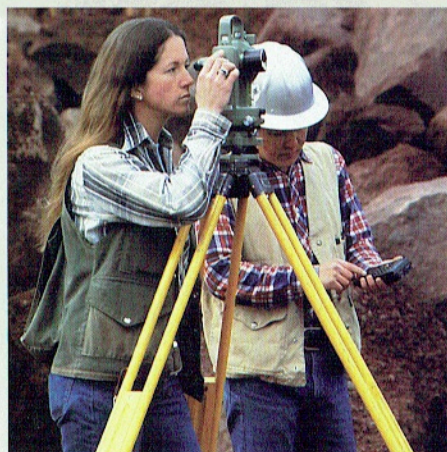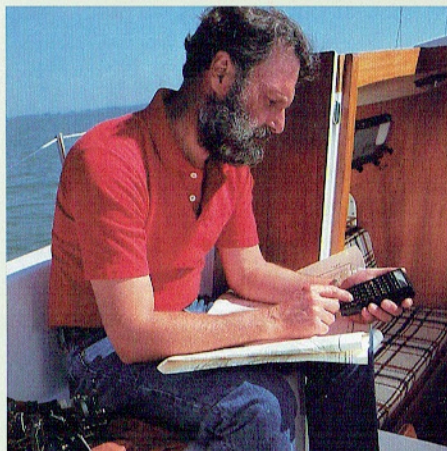

Problem-Solving Power When You Need It, Where You Need It With Advanced Calculators And Handheld Computers . . . . .	1
The HP-41 Advanced Calculator — Calculate, Analyze, Monitor and Control . . . . .	2
HP-41 Key Features . . . . .	2
Hewlett-Packard HP-41CV/HP-41CX Advanced Calculators . . . . .	4
HP-41 Memory . . . . .	7
The HP-71 Handheld Computer — Your BASIC Number Cruncher! . . . . .	8
HP-71 Key Features . . . . .	8
Hewlett-Packard HP-71 Handheld Computer and Memory . . . . .	10
HP-71 Development System — An "Open" Machine . . . . .	16
Enhancements . . . . .	18
Peripherals	
HP-41 . . . . .	24
HP-71 . . . . .	27
HP-41/HP-71 HP-IL . . . . .	28
HP-IL Interfaces and Instruments . . . . .	34
Software	
Overview . . . . .	35
Users' Library . . . . .	35
HP-71 Software Distribution Center . . . . .	35
HP-41 . . . . .	36
HP-71 . . . . .	37
HP-41/HP-71 Custom Products . . . . .	38
HP-41/HP-71 Comparison Chart . . . . .	39








# Problem-Solving Power When You Need It, Where You Need It

*With Advanced Calculators and Handheld Computers From Hewlett-Packard*

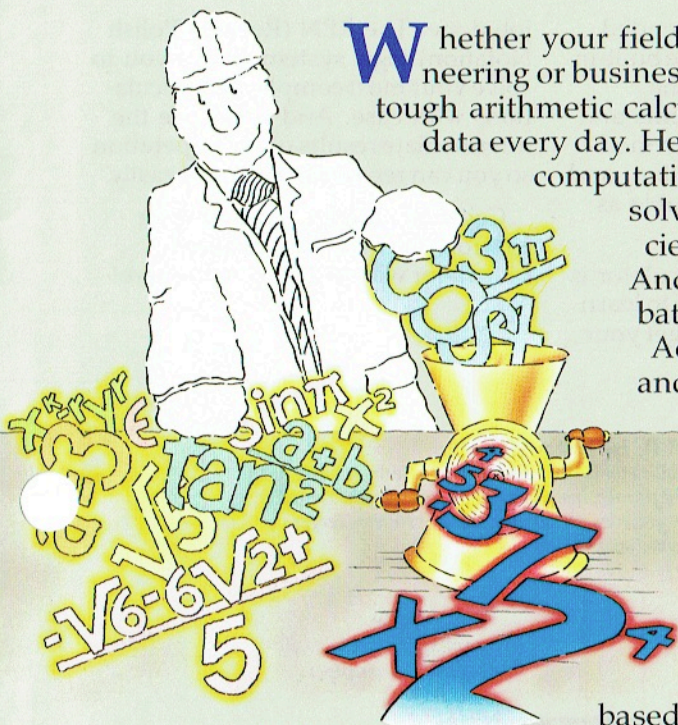

**W**hether your field is science, engineering or business, you have to perform tough arithmetic calculations and analyze data every day. Hewlett-Packard has the computational tools you need to solve these problems efficiently and effectively. And because they are battery-powered, HP-41 Advanced Calculators and HP-71 Handheld computers give you the calculating and computing problem-solving power you need . . . wherever you are.

Both the HP-41 and HP-71 offer ROM-based operating systems, user-definable keyboards, and non-dedicated I/O (input/output) ports. All this in combination with built-in programming features make it exceptionally easy to customize these products. And they're the heart of expandable computer systems for scientific, engineering, and business applications. Simply by adding peripherals, modules, software, and HP-IL (Hewlett-Packard Interface Loop) interfacing, you can expand HP-41 and HP-71 capabilities to those of low-cost computer systems — and still take advantage of user-friendly operation.

There's plenty of software, too. Choose from HP-written Application Pacs with plug-in modules, and Solutions Books with bar code (HP-41 only) and keystroke listings. The HP-41 Translator Pac allows you to run HP-41 software on the HP-71. Most of the thousands of user-written programs available from the Users' Library, plus Solutions Books, can be run on either machine. Application areas include engineering, applied sciences, statistics, math, navigation, real estate, and finance. And of course, you can write your own programs.



# The HP-41 Advanced Calculator— Calculate, Analyze, Monitor and Control

Whether you're performing arithmetic calculations, analyzing data, or controlling a system, the HP-41 Advanced Calculator can adapt to your task.

From your classroom problems to complex instrument control, the HP-41 goes with you. Maximum portability is guaranteed by the size and battery-powered capabilities of the HP-41.

Choose between two HP-41 models — the HP-41CV with 2,233 bytes of main memory, and the HP-41CX with

3,101 bytes of main and extended memory. In addition to all the built-in functions of the HP-41CV, the HP-41CX features built-in Time and Extended Functions/Memory modules, a text-file editing function, and 19 other functions not available as HP-41CV options.

The HP-41 Advanced Calculator is friendly, too; you won't have to learn a programming language to get your

job done. The RPN (Reverse Polish Notation) logic system allows you to solve your most complicated calculations with ease. And you'll see the intermediate results of each operation so you can recover from errors easily.

Calculate, analyze, monitor, or control. Your HP-41 Advanced Calculator will do it all — anywhere!




\*Applies to both HP-41CX and HP-41CV.



"Everything should be made  
as simple as possible,  
but not simpler."

—Albert Einstein (1879–1955)

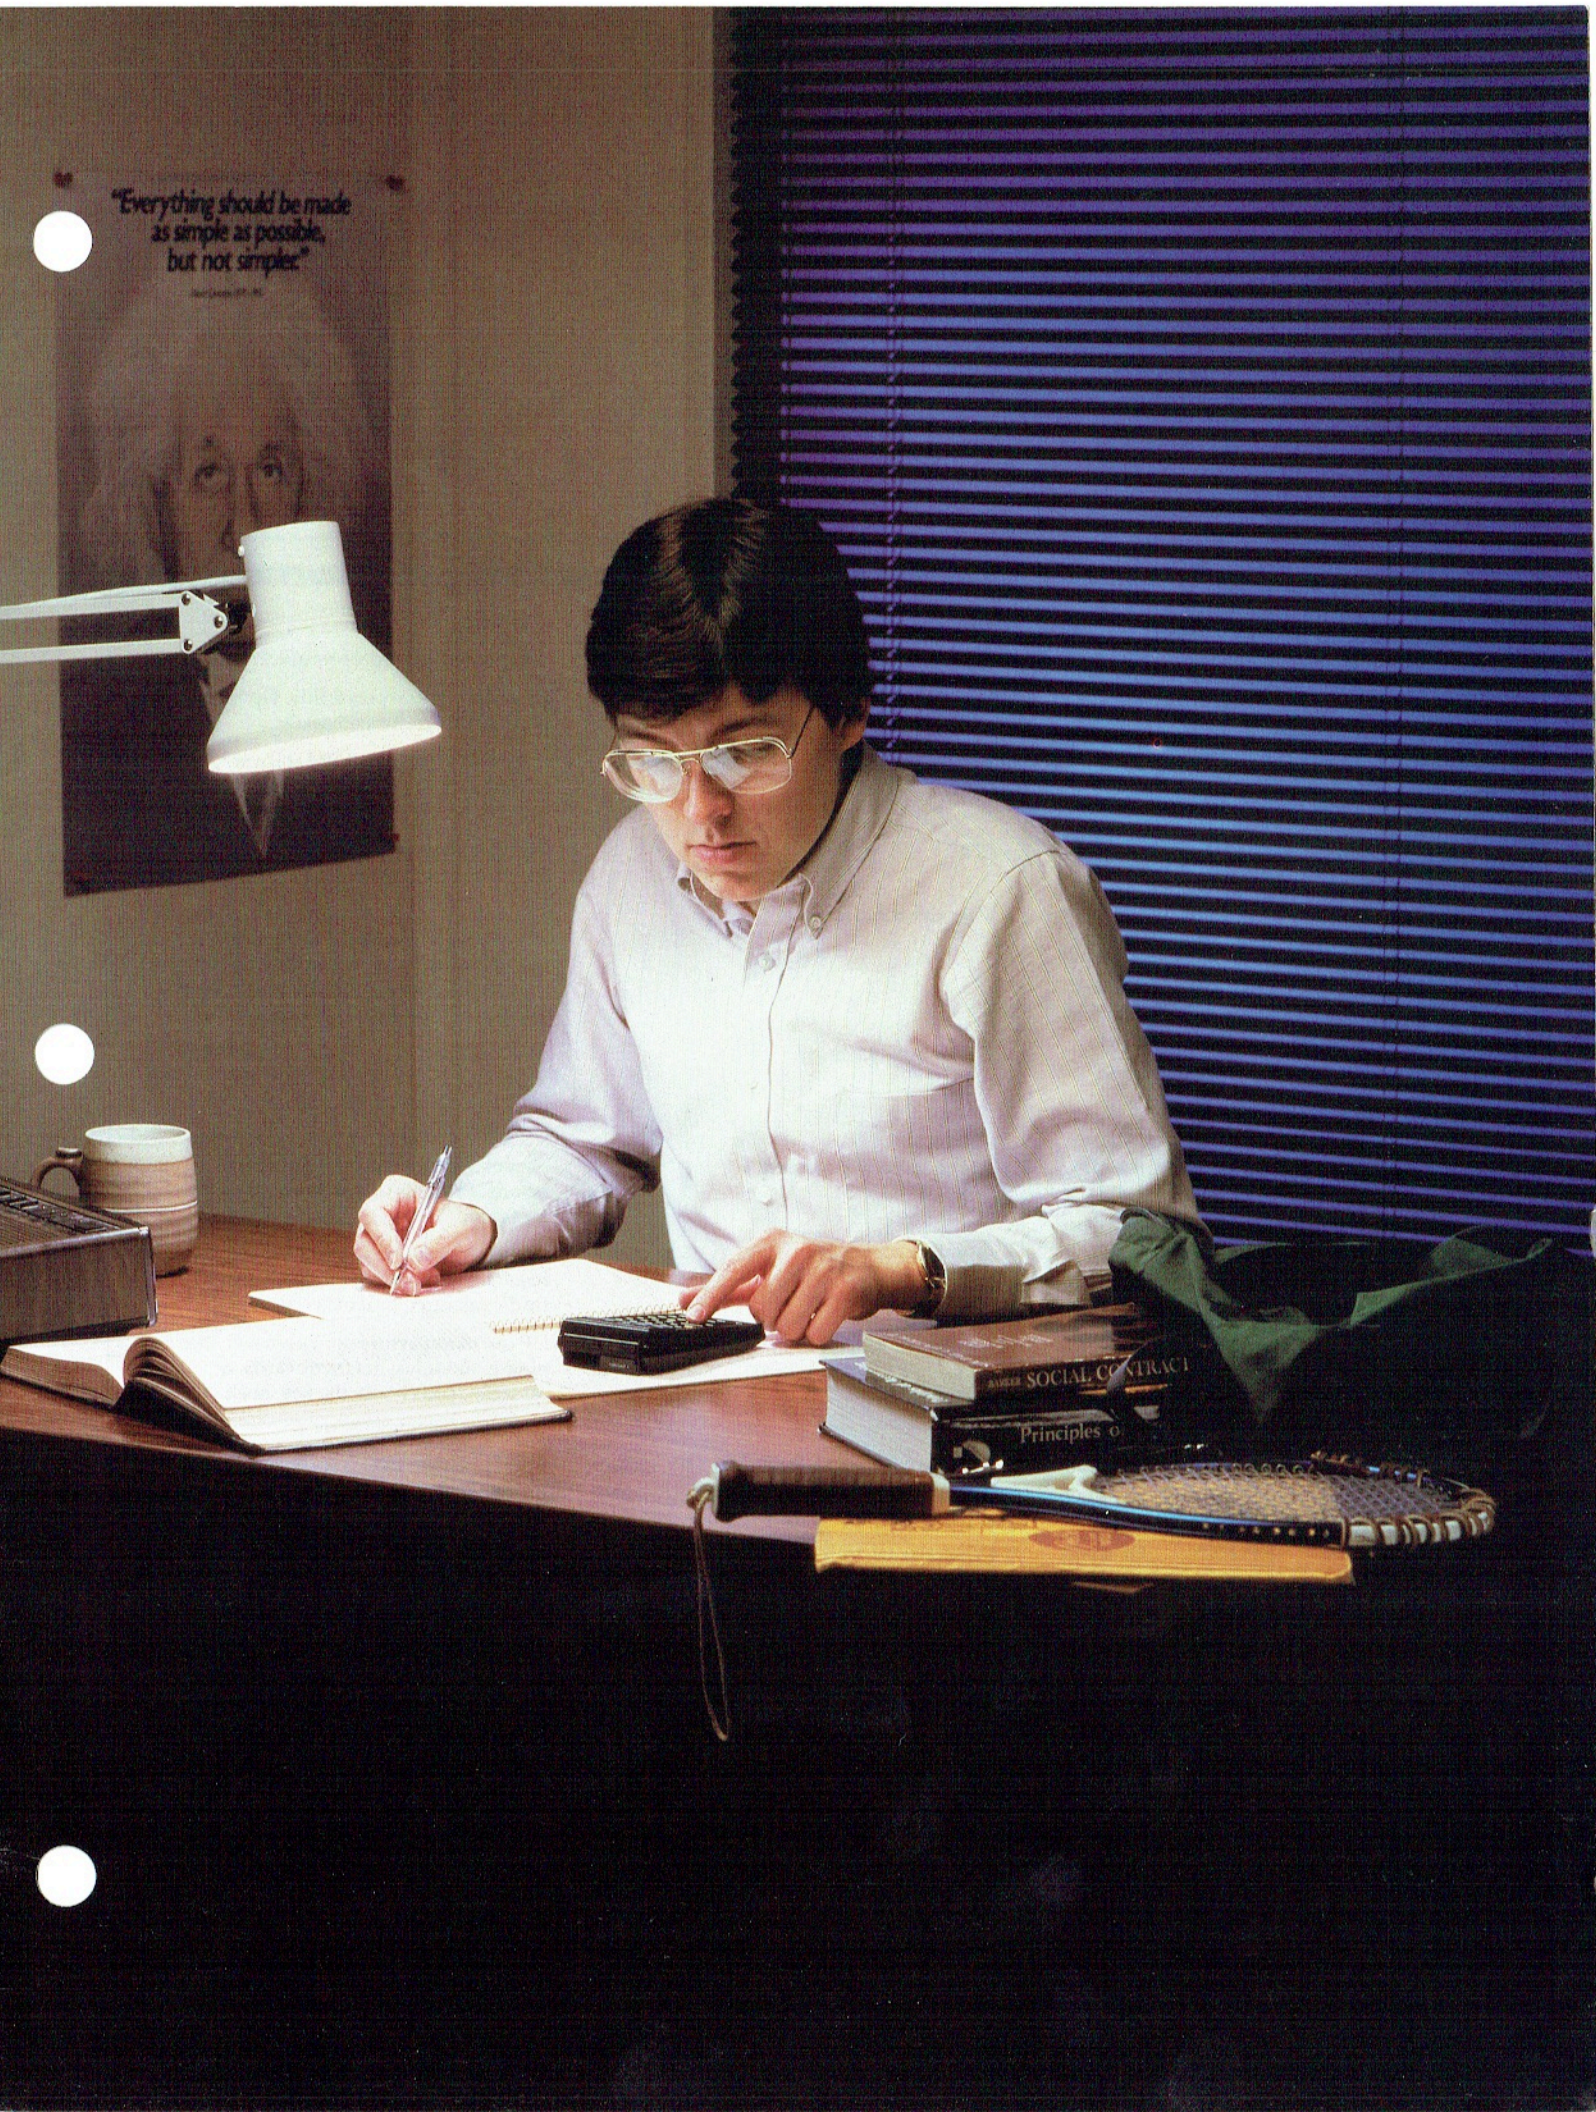



# Hewlett-Packard

## HP-41CV/HP-41CX Advanced Calculators

HP-41 Advanced Calculators combine the speed, power, and accuracy of computers with the portability, touch-key simplicity, and low cost of hand-held calculators.

### Take Your Choice

There are two HP-41 models from which to choose — the HP-41CX and the HP-41CV. The two models differ in the amount of extended memory, as well as in functionality and expandability.

The HP-41CV, with 128 built-in functions, is powerful enough for many applications. The addition of Extended Functions/Memory and Extended Memory modules lets your HP-41 expand when your needs grow.

The HP-41CX offers the most functions and greatest expandability of the HP-41 family. With 20 additional functions for enhanced programming (see functions list, p. 6), the HP-41CX has the power and flexibility to solve most complex problems. The built-in Time and Extended Functions/Memory modules leave the four I/O ports open for other peripherals and software plug-ins. Text-file editing is an added built-in feature in the HP-41CX.

HP-41 Memory Capabilities

	HP-41CV	HP-41CX
<b>Main memory</b>		
Bytes	2,233	2,233
Registers	319	319
<b>Extended memory</b>		
Bytes	868 (optional)	868
Registers	124 (optional)	124
<b>Extended Memory Modules*</b>		
Bytes	1,666	1,666
Data registers	238	238
<b>Maximum memory</b>		
Bytes	6,433	6,433
Data registers	919	919

\*Add a maximum of two.

\*\*All information in the extended memory is organized in program, data or text files. The functions necessary for accessing these files are available in the Extended Functions/Memory Module and in the HP-41CX.

### Features

- Advanced calculator power.
- Battery powered.
- Four I/O ports.
- RPN.
- User-definable keyboard.
- Continuous Memory.
- Alphanumeric keyboard.
- Software.
- Custom Products.

### Benefits

- Solves complex problems quickly, anywhere.
- Offers maximum portability. Optional battery pack may be recharged easily.
- Potential for plug-in ROM software, peripherals, interfacing, and more, to provide problem-solving versatility.
- Consistent, effective logic system. Friendly. Saves time in calculations.
- Assigns any program or function to almost any key. Customizes the keyboard to the user's needs. Toggle selection of either User or Normal keyboards for customized key performance or original key functions.
- Entire contents of memory, including key assignments, are preserved even when the HP-41 is turned off. No reloading of programs necessary.
- Names and labels programs, functions, and results. Prompts in words for easy interpretation.
- Pre-tested solutions assure fast, accurate results. Plug-in ROM modules, magnetic cards, cassettes, and bar code available.
- HP can manufacture your own software as plug-in modules, magnetic cards, or cassettes; you choose the key labels.

You can further expand the memory with non-volatile extended memory modules to give either model a maximum of 919 registers.\*\*

### HP-41 Features

- **RPN Reverse Polish Notation** provides a consistent and efficient logic system. RPN is fast, eliminating the need for equals and parenthetical keystrokes. Error recovery is simplified by automatic storage of the last entry. It also lets you see your intermediate results.
- **Four input/output ports** Plug in ROM software modules or add to existing memory capacity with plug-in memory modules. The

HP-IL Interface Module allows connection to peripheral devices. A Plotter Module provides plotting and bar code capabilities for the HP-41 with the HP 7470A Plotter; a Time Module expands your system with time information and time-controlled operations. The Extended I/O Module enhances the HP-41's control of the HP-IL loop. Customize your applications with plug-in Custom Modules that provide your own means of permanent and private program storage. The Time and Extended Functions/

(Continued on next page)



Memory modules are built right into the HP-41CX, leaving all four ports open for other special-function plug-ins.

- **Software** A broad range of available software provides immediate, accurate solutions. HP-written application pacs with plug-in modules, Solutions Books with keystroke listings and bar code, and Users' Library programs are just a few of the software options available.
- **Expandable** Maximum memory is 6.4K bytes with two extended memory modules. Interfacing capabilities allow the use of various printers, plotters, monitors, mass storage devices, acoustic couplers, instruments, and access to the power of larger computers.

- **Redefinable keyboard** Over 200 separate operations (over 128 in the HP-41CV) reside in the HP-41CX function library, with 58 of these right on the keyboard. Each key may be redefined. Or, choose an operation from an application pac or program and assign it to almost any key.
- **Continuous Memory** Preserve everything from stored data to user-defined keyboard assignments while the HP-41 is turned off. Enter frequently needed calculations once, and then perform them as often as necessary, without having to reenter the program.
- **Built-in operating system** A 24K-byte operating system (12K in the HP-41CV) allows for immediate solutions to complex problems.

- **Portable** Four 1.5V N-sized, alkaline batteries supply all the power you'll need. Carry the HP-41 in your pocket or briefcase. There will always be room for it on your desk or workstation.
- **Liquid-crystal display** The display is easy to read and helps to eliminate glare problems from sunlight and other sources. Low power consumption minimizes battery drain. The display allows you to view ten digits or twelve alpha characters. Automatic scrolling shows you up to 24 alpha characters.

## HP-41 Specifications

**DIMENSIONS** . . . 14.2 cm (5.6 in) x 7.9 cm  
(3.1 in) x 3.3 cm (1.3 in)

**WEIGHT** . . . . . 205 g (7.2 oz) with  
batteries

### POWER

**Batteries** . . . . . four 1.5V, size N batteries (replaceable by user)

**Battery current**  
(worst case) . . . 20 mA (operating)  
2 mA (idle)  
50  $\mu$ A (off)

**Average alkaline battery life** . . . up to 6 months (battery life depends upon use, less when a peripheral device without its own power source is in use)

### OPERATING REQUIREMENTS

**Operating temperature** . . . 0° to 45°C (32° to 113°F)

### Storage

**temperature** . . . -20° to 65°C (-4° to 149° F)

**Humidity** . . . . . 40°C at 95%

### DISPLAY

**Capacity** . . . . . 10 digits; 12 alpha characters displayed (scroll to view 24); 12 annunciator words; each character position consists of 17 segments, including 3 punctuation segments.

### CHARACTER RANGE

A-Z, a-z, 0-9, plus 37 special characters, some of which can be obtained only by using optional plug-in peripherals.

### DYNAMIC RANGE

$\pm 1.000000000 \times 10^{-99}$  to  $\pm 9.999999999 \times 10^{99}$ , plus zero.

Numbers are shown with a maximum of ten digits, or an 8-digit mantissa and a 2-digit exponent.

Displayed numbers are rounded to the last displayed digit, calculations are performed internally with at least ten digits.

## HP-41 ADVANCED CALCULATORS COME COMPLETE WITH:

- The appropriate owner's documentation: HP-41CX Owner's Manual (Vol. I and Vol. II)  
HP-41CX Pocket Operating Guide  
HP-41CV Owner's Manual: BASIC Operation  
HP-41CV Quick Reference Card
- And the following:  
Tough, pliable carrying case  
Four type N batteries  
Overlay packet  
Users' Library subscription card

(Continued on next page)



## HP-41 FUNCTIONS LIST

■—Shift key.  
 +—Addition operator.  
 —Subtraction operator.  
 \*—Multiplication operator.  
 /—Division operator.  
 1/X—Reciprocal.  
 10<sup>1X</sup>—Common antilogarithm.  
 ABS—Absolute value.  
 ACOS—Arc (inverse) cosine.  
 ADV—Advance paper.  
 AOFF—Alpha mode off.  
 AON—Alpha mode on.  
 APPEND—Append characters (+).  
 ARCL—Alpha recall.  
 ASHF—Alpha shift left.  
 ASIN—Arc (inverse) sine.  
 ASN—Assign.  
 ASTO—Store Alpha data in register.  
 ATAN—Arc (inverse) tangent.  
 AVIEW—Alpha view.  
 BEEP—Beeper.  
 CAT—Catalog.  
 CF—Clear flag.  
 CHS—Change sign.  
 CLA—Clear Alpha register.  
 CLD—Clear display.  
 CLP—Clear program.  
 CLRG—Clear register.  
 CLΣ—Clear statistics registers.  
 CLST—Clear stack registers.  
 CLX—Clear X-register.  
 COPY—Copy program from module or peripheral into program memory.  
 COS—Cosine.  
 D—R—Degrees to radians conversion.  
 DEC—Octal to decimal conversion.  
 DEG—Degrees mode.  
 DEL—Delete program memory lines.  
 DSE—Decrement, skip if equal.  
 EEX—Enter exponent.  
 END—End program.  
 ENG—Engineering notation.  
 ENTER1—Enter number in X-register into Y-register.  
 EIX—Natural antilogarithm.  
 EIX—1—Natural antilogarithm for arguments close to zero.  
 FACT—Factorial.  
 FC?—"Flag clear" test.  
 FC?C—"Flag clear" test and clear.  
 FIX—Fixed point display.  
 FRC—Fractional portion of number.  
 FS?—"Flag set" test.  
 FS?C—"Flag set" test and clear.  
 GRAD—Grads mode.  
 GTO—Go to label.  
 HMS—Decimal hours to hours, minutes, seconds conversion.  
 HMS+—Hours, minutes, seconds addition.  
 HMS—Hours, minutes, seconds subtraction.  
 HR—Hours, minutes, seconds to decimal hours conversion.  
 INT—Integer portion of number.

ISG—Increment, skip if greater.  
 LASTX—Recalls LAST X register contents to X-register.  
 LBL—Program label.  
 LN—Natural logarithm.  
 LN1 + X—Natural logarithm for arguments close to one.  
 LOG—Common logarithm.  
 MEAN—Mean.  
 MOD—Modulo (remainder).  
 OCT—Decimal to octal conversion.  
 OFF—Power off.  
 ON—Power on (continuous) function.  
 P—R—Polar to rectangular conversion.  
 PACK—Pack program memory.  
 %—Percent.  
 %CH—Percent of change.  
 PI—Pi (3.141592654).  
 PROMPT—Prompt.  
 PSE—Pause.  
 R1—Roll up stack.  
 R—D—Radians to degrees conversion.  
 R—P—Rectangular to polar conversion.  
 R/S—Run or stop a program.  
 RAD—Radians mode.  
 RCL—Recall data from register into X-register.  
 RDN—Roll down stack.  
 RND—Round.  
 RTN—Return.  
 SCI—Scientific notation.  
 SDEV—Standard deviation.  
 SF—Set flag.  
 Σ+—Accumulations for statistics.  
 Σ—Accumulation correction.  
 ΣREG—Statistical register block specification.  
 SIGN—Sign of x.  
 SIN—Sine.  
 SIZE—Size of data storage register allocation.  
 SQRT—Square root.  
 ST+—Storage register addition.  
 ST—Storage register subtraction.  
 ST\*—Storage register multiplication.  
 ST/—Storage register division.  
 STO—Store numeric data in register.  
 STOP—Stops program execution.  
 TAN—Tangent.  
 TONE—Tone.  
 VIEW—View register contents.  
 X=0?"X=0?" conditional test.  
 X≠0?"X≠0?" conditional test.  
 X<0?"X<0?" conditional test.  
 X≤0?"X≤0?" conditional test.  
 X>0?"X>0?" conditional test.  
 X=Y?"X=Y?" conditional test.  
 X≠Y?"X≠Y?" conditional test.  
 X<Y?"X<Y?" conditional test.  
 X≤Y?"X≤Y?" conditional test.  
 X>Y?"X>Y?" conditional test.  
 X<>—Exchange X- and any register.  
 X<>Y—Exchange X- and Y-registers.  
 XEQ—Execute.  
 X12—Square.  
 Y1X—Exponential.

## FUNCTIONS UNIQUE TO THE HP-41CX

ASROOM—Number of bytes left in working ASCII file.  
 CLALMA—Clear alarm by Alpha register.  
 CLALMX—Clear alarm by X-register.  
 CLRALMS—Clear all alarms.  
 CLRGX—Clear a specified block of registers.  
 ED—Text Editor.  
 EMDIRX—Access extended memory directory.  
 EMROOM—Number of unused registers in extended memory.  
 ΣREG?—Return number of first statistics register to X.  
 GETKEYX—Return ASCII code to X-register and keycode to Y-register.  
 RCLALM—Recall alarm.  
 RESZFL—Resize ASCII or data file.  
 SWPT—Activates stopwatch and sets pointers.  
 CAT6—Lists all user key assignments in order of key code.  
 X=NN?—conditional test.  
 X≠NN?—conditional test.  
 X<NN?—conditional test.  
 X≤NN?—conditional test.  
 X>NN?—conditional test.  
 X≥NN?—conditional test.

## CALCULATOR MODES

USER—User mode key.  
 PRGM—Switches into/out of Program mode.  
 ALPHA—Switches into/out of Alpha mode.

## EDITING

←—Correction key.  
 GTO.—Go to the line number of Alpha label.  
 GTO.—Go to end of program memory.  
 BST—Back step.  
 SST—Single step.

## HP-41 ACCESSORIES

- HP-41CX Owner's Manual
  - Vol. I Basic Operation (00041-90474)
  - Vol. II Operation in Detail (00041-90492)
- HP-41CX Pocket Operating Guide (00041-90475)
- HP-41CV Owner's Manual (00041-90526)
- HP-41CV Guide for the Experienced User (00041-90259)
- HP-41 Overlay Kit (82152A)
- HP-41CV Operation in Detail (00041-90531)
- HP-41 Module Holders (2) (82151A)
- Multipurpose Rechargeable Battery Pack (82120A)
- AC Adapter/Recharger (for HP 82143A and HP 82120A) (82059D)
- Extended Use Battery Charger (92266A)
- Spare Set of Nickel Cadmium Batteries (92266B)
- HP-41 50 Blank Overlays (82172A)
- "Creating Your Own Bar Code" Manual (82153-90019)
- Vinyl Case (Card Reader) (82111A)
- Program Pad (00097-13154)




# Hewlett-Packard

## HP-41 Memory

### HP-41 Extended Memory Modules

Make your HP-41 even more versatile with Extension Modules. By adding one HP 82180A Extended Functions/Memory Module (built into the HP-41CX) and two HP 82181A Extended Memory Modules, you can give your HP-41 a maximum of 4.2K bytes of non-volatile mass memory.\* The Extended Functions/Memory Module also increases the HP-41 programming set.

### HP-41 Memory Configurations

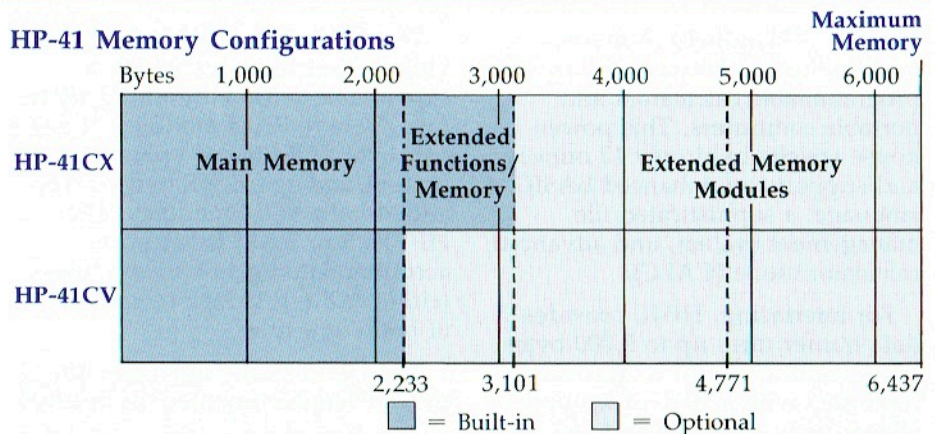

### Physical Specifications

**DIMENSIONS** . . . 3.2 cm (1.3 in) x 1.0 cm (0.4 in) x 2.9 cm (1.2 in)

### OPERATING REQUIREMENTS

**Operating temperature** . . . 0° to 45°C (32° to 113°F)  
**Storage temperature** . . . -20° to 65°C (-4° to 149° F)

### Extended Functions/Memory Module Functions List

#### PROGRAMMABLE FUNCTIONS

PASN—Programmable ASN function.  
 CLKEYS—Clear all key assignments.  
 PCLPS—Delete named program and all following it from main memory.  
 PSIZE—Programmable SIZE function.  
 SIZE?—Return number of data storage registers to X-register.  
 GETKEY—Return keycode for pressed key.  
 REMOVE—Copy contents of a block of registers.  
 REGSWAP—Swap contents of two blocks of registers.

RCLFLAG—Recall flag-status data to the X-register.  
 STOFLAG—Restore flag status.  
 X<>F—X-register exchange with flag 00-07 status.  
 ATOX—Convert left-most ALPHA character to numeric character code.  
 XTOA—Convert X-register to its equivalent character and append to ALPHA register.  
 ALENG—Return number of characters in ALPHA register.  
 ANUM—Value of an ALPHA-formatted number.  
 POSA—Position of ALPHA character.  
 AROT—Rotate contents of ALPHA register.  
 APPCHR—Append contents of ALPHA register at the end of current register.  
 APPREC—Append contents of ALPHA register as a new record at the end of current file.  
 ARCLREC—Append record from current file to main memory.  
 CRFLAS—Create text (ASCII) file.  
 CRFLD—Create data file.  
 DELCHR—Delete characters in file.  
 DELREC—Delete record in current file.

EMDIR—Directory of extended memory files.  
 FLSIZE—Return number of registers in file.  
 GETAS—Copy text (ASCII) file from mass storage.  
 GETP—Replace last program in main memory.  
 GETR—Copy data file to main memory registers.  
 GETREC—Copy record from current file to main memory.  
 GETRX—Copy current data-file registers to X-register.  
 GETSUB—Copy program into main memory.  
 GETX—Copy current register in current file to X-register.  
 INSCHR—Insert contents of ALPHA register into text (ASCII) file.  
 INSREC—Insert contents of ALPHA register as a new record.  
 PURFL—Purge file.  
 RCLPT—Recall pointer value of current file.  
 RCLPTA—Recall pointer value of named file.  
 SAVEAS—Copy text (ASCII) file to mass storage.

\* No more than one HP 82180A Extended Functions/Memory Module or two HP 82181A Extended Memory Modules should be plugged into an HP-41CV. The HP 82180A is required when using the HP 82181A.



# The HP-71 Handheld Computer — Your BASIC Number Cruncher!

The HP-71 Handheld Computer bridges the gap between advanced programmable calculators and portable computers. This powerhouse weighs in at only 12 ounces, and supports an enhanced BASIC language, a sophisticated file management system, and advanced calculator mode (CALC).

For interfacing, HP-IL provides data transfer rates up to 5,000 bytes per second. Powerful CALC mode, combined with a 10-digit keypad allows quick solutions and fast, easy input of numeric data.

The HP-71 has 17.5K bytes of built-in user memory, which is expandable to 33.5K by adding up to four 4K-byte RAM modules. It has a 64K byte ROM-based operating system, and up to 256K bytes can be added with ROM modules. The HP-71's four RAM/ROM ports accommodate up to four modules (either ROM, RAM, or a combination of both) at a time.

The HP-71 is an "open machine," too. HP has documented the internal

hardware and software specifications, and they are available for purchase. They aid you in designing and interfacing your own hardware, software, and firmware to the HP-71.

And whether you're creating sophisticated programs or crunching numbers, the HP-71 backs you up with the power, accuracy and versatility you demand.

## HP-IL Interface

option for connecting to a wide variety of battery-powered devices for mass storage, display, printing, plotting, test, and measurement.

## Liquid-crystal Display

22-character window on a 96-character line displays upper- and lowercase letters with true descenders. Use cursor keys to step through programs one line at a time. Create your own special characters. Scroll to view the entire line of large, easy-to-read characters. Display annunciators at both ends of the display serve as mode indicators.

## Battery Power


four 1.5V, AAA size batteries assure portability. Or, use the optional AC adapter.

## Card Reader

option to use small, inexpensive, magnetic cards for mass storage and easy program loading.

## BASIC Language

powerful programming language.

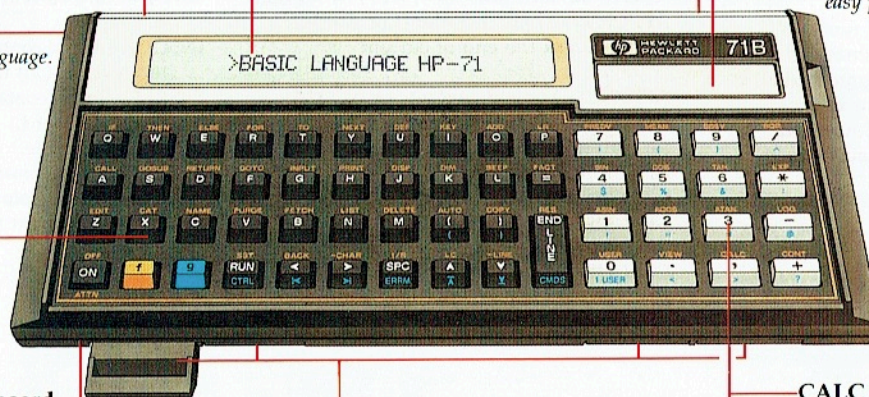

## Block QWERTY Keyboard

enter alphabetical information quickly and easily. Redefine the keys to suit your changing needs, and store the redefinitions to use later.

## Continuous Memory

turn your HP-71 off and return later without losing calculations and programs.

## Four Ports

accept any combination of memory modules or application software to increase computation power.

## CALC Mode

cut your one-time calculations down to size.

## Five-level Command Stack

recall any of your last five commands for editing and re-use.

## 10-digit Key Pad

fast, easy input of numeric data.







# Hewlett-Packard HP-71 Handheld Computer and Memory

The HP-71 Handheld Computer – a portable, 12-ounce package that puts a powerful calculation mode, BASIC language, and expansion potential right at your fingertips. The HP-71 offers a built-in operating system larger than many desktop computers. Use it alone or configured as part of an HP-IL (Hewlett-Packard Interface Loop) system for expanded, personalized computing.

## HP-71 Features

■ **CALC mode** A powerful, nonprogrammable operating mode, CALC is easy to learn and simple to use. It is optimized for calculations to handle your most complex computations. Expressions are easy to key in — work from left to right in true algebraic format, and watch your intermediate results develop as you go along. Twelve decimal digits of accuracy assure you of precise results. And, CALC mode interacts with BASIC; a variable assigned a value in BASIC retains that value in CALC mode, and vice versa. Any numeric expression that can be keyed in and evaluated in BASIC can also be evaluated in CALC mode. You can use all of the built-in HP-71 numeric functions and operators, as well as your own single-line functions. Statistics functions are built-in, allowing you to perform computations on up to 15 independent variables. And a complete set of trig functions lets you evaluate complex equations with no extra effort.

■ **BASIC programming language** Develop your programs in a friendly, familiar language. Over 240 functions, statements, and operators complement a language powerful enough to handle almost all of your programming needs. To

## Features

- CALC mode.
- Built-in 64K-byte ROM BASIC operating system.
- User-definable keyboard.
- Four RAM/ROM ports.
- Software.
- Optional HP-IL interface.
- Optional Card Reader.

## Benefits

Fast, accurate solutions to complex calculations. Easy to use and edit. Increase computational flexibility by sharing variables with BASIC.

Powerful file management system. Simple to program using over 240 keywords. Efficient, accurate computations with results to 12-digit precision.

Reduce program and data entry time by assigning specific functions to specific keys. More efficient use of operating time.

Increase memory and storage capacity. Add to problem-solving versatility by combining plug-in ROM and RAM modules.

Pre-tested solutions assure fast, accurate results. Choice of media: plug-in modules, magnetic cards, and cassettes.

Tap the resources of larger computers. Control instruments without being present. Print, store, and expand display capabilities by adding peripherals and accessories.

Convenient and inexpensive off-line storage of data and programs. Easy program loading.

help increase your programming versatility and flexibility, create subprograms. Parameters can be passed from main programs to the subprograms. The enhanced HP-71 BASIC supports the IEEE Radix Independent Floating-Point Math Standard to give you more control and accuracy in your computations.

- **Built-in operating system** The powerful, calculation-oriented 64K-byte operating system allows for high-level programming in addition to repetitive calculations.
- **Five-level command stack** Your last five commands are stored in HP-71 memory so that you can recall any of them to modify and reuse. (With Users' Library software the command stack is

expandable to 16 levels.) That's a real time saver when you're executing a series of commands, or when you need the combined results of several equations.

- **Expandable** The HP-IL interfacing option opens the door to a broad array of accessories, peripherals, instruments, and other computers. Print, store, retrieve, and display information, as well as communicate with larger computers.
- **Four RAM/ROM ports** Choose your memory requirements, to a maximum of 33.5K bytes of user-accessible memory. Plug in up to four 4K-byte RAM modules to increase your memory and storage capacity by 16K bytes. To allow for

*(Continued on next page)*



future development, the HP-71 is designed to be capable of directly addressing 512K bytes. And, you can add ROM software modules for speedy execution of specific solutions. Customize your applications with plug-in Custom ROM Modules to add unique problem-solving capabilities and a means of permanent, private storage. Any of the internal or external RAM can be set aside for program or data storage so you can locate files quickly and protect them from some memory reset conditions. You can also remove memory modules without disturbing files in the rest of RAM.

- **Typing aids** Often-used keywords or instructions can be displayed simply by pressing a shifted key.

Reduce your program and data entry time by using these built-in typing aids.

- **Redefinable keyboard** Each key on the keyboard can be redefined (except the blue and gold shift keys) to increase your calculating efficiency. Redefine the shifted key functions, too, and further expand the number of functions available to you. Assign your own typing aids to any convenient key, execute a particular statement or program from the keyboard, and simplify data entry while you're running a program.
- **Multiple file structure** The number of files in HP-71 memory is limited only by the amount of available

RAM. Seven different file types are supported: BASIC, BIN, LEX, DATA, TEXT, KEY, and SDATA.

- **Clock/calendar** A built-in quartz-crystal clock can be set with an accuracy of 1 second per month or better. It runs even when your HP-71 is turned off. Create and use clock/calendar dependent programs that must begin and run when you can't be there to control the process. Three independent timers are available for your use.
- **Software** HP-written software in a variety of applications is available to give you ready-to-go solutions. Each application pac comes with a convenient plug-in module and complete documentation.

## Physical Specifications

**DIMENSIONS** . . . 19 cm (7.5 in) x 9.7 cm (3.8 in) x 2.5 cm (1.0 in)

**WEIGHT** . . . . . 340 g (12 oz) with batteries

### POWER

Batteries . . . . . four 1.5V, size AAA alkaline batteries (replaceable by user)  
Battery current . . . 10 mA (operating)  
                              .75 mA (idle)  
                              .03 mA (off)

Average alkaline battery life . . . 60 operating hours (battery life depends upon use)  
AC adapter (82059D) optional. (Does not recharge batteries.)

### OPERATING REQUIREMENTS

Operating temperature . . . 0° to 45°C (32° to 113°F)

Storage temperature . . . -40° to 55°C (-40° to 131° F)

Humidity . . . . . 0% to 95% relative humidity

### DISPLAY

Liquid-crystal display  
Character font . . . . 6 x 8 dot matrix  
Capacity . . . . . 96 characters per line  
Window size . . . . 22 characters (scroll to 96 characters)  
Character set . . . . 256 characters

### CHARACTER RANGE

A-Z, a-z, 0-9, plus 65 special characters.

### NUMBER RANGE

Real precision . . . -9.9999999999E499 to -1E-499, 0, 1E-499 to 9.9999999999E499

Short precision . . . -9.9999E499 to -1E-499, 0, 1E-499 to 9.9999E499

Integer precision . . -99999 to 99999

Variable types . . . Numeric, String, Numeric array, String array

Numbers are shown with a maximum of 12 digits, or a 12-digit mantissa and a three-digit exponent. Calculations are accurate to 12 digits.

### CLOCKS & TIMERS

Perpetual clock calendar; 24-hour format.  
Time function returns time to the nearest hundredth of a second.

Accuracy range . . 15 seconds/month to 3 minutes/month

Adjustable clock speed . . . . ± 10%

### BEEPER

The beeper is programmable with parameters for duration and tone. The frequency range is approximately 5 to 6200 Hz.

### REDEFINABLE

KEYS . . . . . 159

### MULTIPLE FILE STRUCTURE

The number of files in HP-71 memory is limited only by the amount of available RAM.

Seven different file types are supported:

BASIC—Contains BASIC programs.

BIN—Assembly language programs to be executed as programs or subprograms.

LEX—Add new BASIC keywords.

DATA—Store numeric and string data.

TEXT—Transfer or receive files from other computers as string data.

KEY—Store and retrieve redefined key assignments.

SDATA—Transfers data to and from an HP-41 Advanced Calculator.

### LANGUAGE

Extended HP BASIC (over 240 instructions)

(Continued on next page)



## HP-71 Handheld Computer (cont.)

### ROM/RAM

Built-in operating system ROM . . . 64K bytes  
Four 16K, 32K, 48K, or 64K byte plug-in ROMs make an additional 256K ROM possible.

Built-in user RAM . . . 17.5K

Enhancement Memory Module (HP82420A) . . . 4K bytes

Maximum system RAM (with four Memory Modules) . . . 33.5K bytes

### CONTINUOUS MEMORY

Retains data and programs even when the computer is turned off.

### HP-71B HANDHELD COMPUTERS COME COMPLETE WITH:

- HP-71 Owner's Manual
- HP-71 Reference Manual
- Quick Reference Guide
- Blank Keyboard Overlay
- Four AAA Batteries
- Users' Library/Third Party Software Card
- Carrying Case

### HP-71 FUNCTIONS LIST

#### PROGRAM ENTRY/EDITING

AUTO—Numbers lines automatically.

DELETE—Deletes program line(s) from current file.

EDIT—Assigns "current file" status to specified file.

FETCH—Displays any line of current program.

LIST—Displays listing of specified lines in a file.

NAME—Names the workfile.

PLIST—Prints listing of specified lines in a file.

PRIVATE—Limits access to file and restricts changes in its protection.

REM (!)—Enables entry of comments in program lines for program documentation.

RENUMBER—Renumbers lines in current file.

SECURE—Protects file from being altered or purged.

TRANSFORM—Transforms BASIC file to TEXT file, or reverse.

UNSECURE—Clears file access restriction set by SECURE.

@—Appends a statement in a multiple-statement line.

#### PROGRAM EXECUTION

CALL—Transfers program execution to subprogram.

CHAIN—Purges current file, copies specified file into main RAM, and executes that file.

CONT—Continues execution of suspended program.

RUN—Executes a BASIC or binary program.

#### PROGRAM CONTROL

BYE—Turns computer off.

CALL—Transfers program execution to subprogram.

CHAIN—Purges current file, copies specified file into main RAM, and executes that file.

DEF FN—Indicates beginning of user-defined function definition.

END—Terminates a subprogram, user-defined function, or program.

END DEF—Causes normal return from a multiple-statement user-defined function.

END SUB—Causes normal return from subprogram invoked by CALL statement.

FN—Transfers program execution to specified user-defined function.

FOR . . . NEXT—Defines loop that is repeated until loop counter exceeds specified value.

GOSUB—Transfers program execution to subroutine.

GOTO—Transfers program execution to specified statement.

IF . . . THEN . . . ELSE—Provides conditional execution.

OFF—Turns computer off.

OFF ERROR—Disables any previous ON ERROR statement.

OFF TIMER—Deactivates corresponding ON TIMER # statement.

ON ERROR GOSUB—Executes specified subroutine when an error occurs.

ON ERROR GOTO—Executes specified branch when an error occurs.

ON TIMER #—Interrupts program at specified time and causes specified branching to occur.

ON . . . GOSUB—Transfers program execution to selected subroutine.

ON . . . GOTO—Transfers program execution to selected statement or line.

ON . . . RESTORE—Selects which DATA statement will be used by next READ statement.

PAUSE—Suspends program execution.

POP—Cancels pending return of program execution from current subroutine.

RETURN—Returns program execution to statement following invoking GOSUB.

STOP—Terminates a subprogram, user-defined function, or program.

SUB—Identifies beginning of subprogram.

WAIT—Causes program execution to wait for specified number of seconds.

#### DEBUGGING

CONT—Continues execution of suspended program.

DEFAULT—Sets math exception traps to specific values.

ERRL—Returns line number of most recent error or warning.

ERRM\$—Returns message text of most recent error or warning.

ERRN—Returns error number of most recent error or warning.

ON ERROR GOSUB—Executes specified subroutine when an error occurs.

ON ERROR GOTO—Executes specified branch when an error occurs.

PAUSE—Suspends program execution.

TRACE—Traces program flow and variables in a running program.

#### STORAGE ALLOCATION

CLAIM PORT—Returns independent RAM to main RAM status.

DESTROY—Deletes variables and arrays from memory.

DIM—Allocates memory for string or REAL variables and arrays.

FREE PORT—Switches a portion of main RAM to independent RAM status.

INTEGER—Creates INTEGER variables and arrays.

MEM—Returns number of bytes available in memory.

OPTION BASE—Specifies subscript's lower bound for arrays.

REAL—Creates REAL variables and arrays.

SHORT—Creates SHORT variables and arrays.

(Continued on next page)



## HP-71 Functions List (cont.)

SHOW PORT—Displays type and size of all plug-in memory devices and independent RAMs.

STAT—Selects or creates a statistical array.

### LOGICAL AND RELATIONAL OPERATORS

AND—Performs logical And of its operands.

EXOR—Performs logical Exclusive Or of its operands.

NOT—Performs logical Not of its operand.

OR—Performs logical Or of its operands.

=—Performs Equality test on its operands.

#—Performs Inequality test on its operands.

<>—Performs Less Than or Greater Than test on its operands.

<—Performs Less Than test on its operands.

<=—Performs Less Than or Equal To test on its operands.

>—Performs Greater Than test on its operands.

>=—Performs Greater Than or Equal To test on its operands.

?—Performs Unordered Comparison test on its operands.

### ARITHMETIC OPERATORS

+—Addition.

—Subtraction.

\*—Multiplication.

/—Division.

DIV—Divides one argument by another and returns integer portion of quotient.

^—Exponentiation.

%—Percent.

### GENERAL MATH

ABS—Returns absolute value of its argument.

CEIL—Returns smallest integer greater than or equal to specified argument.

CLASS—Returns value indicating class of argument.

DVZ—Returns divide-by-zero flag number (-7).

EXPONENT—Returns exponent of its normalized argument.

FACT—Returns factorial of non-negative integer argument.

FLOOR—Returns greatest integer less than or equal to argument.

FP—Returns fractional part of numeric value.

INT—Returns greatest integer less than or equal to argument.

INX—Returns inexact result flag number (-4).

IP—Returns integer part of argument.

IVL—Returns invalid operation flag number (-8).

LET—Assigns value to variable.

MAX—Returns larger of two values.

MIN—Returns smaller of two values.

MOD—Returns remainder of modulo reduction.

OPTION ROUND—Selects roundoff setting.

OVF—Returns overflow flag number (-6).

RANDOMIZE—Specifies a "seed" for the RND function.

RED—Returns remainder of argument reduction.

RES—Returns value of most recently executed numeric expression.

RMD—Returns remainder of division.

RND—Returns next real number in a pseudo-random number sequence and updates current seed.

SGN—Returns -1, 0, or 1 if argument is less than zero, equal to zero, or greater than zero, respectively.

SQR—Returns square root of argument.

SQRT—Alternate spelling for SQR.

UNF—Returns underflow flag number (-5).

### LOGARITHMIC OPERATIONS

EXP—Returns the number  $e = 2.718281828$  . . . raised to power given by argument.

EXPM1—Returns value of  $e^{\text{argument}} - 1$ .

EXPONENT—Returns exponent of normalized x.

LGT—Alternate spelling for LOG10.

LN—Alternate spelling for LOG.

LOG—Returns natural logarithm (base  $e$ ) of argument.

LOGP1—Returns  $\ln(1 + \text{argument})$ .

LOG10—Returns logarithm (base 10) of argument.

### TRIGONOMETRIC OPERATIONS

ACOS—Returns arccosine of its argument.

ACS—Alternate spelling for ACOS.

ANGLE—Returns polar angle determined by (x,y) coordinate pair.

ASIN—Returns arcsine of its argument.

ASN—Alternate spelling for ASIN.

ATAN—Returns arctangent of its argument.

ATN—Alternate spelling for ATAN.

COS—Returns cosine of its argument.

DEG—Converts argument in radians to degrees.

DEGREES—Sets unit of measure for expressing angles to degrees.

OPTION ANGLE—Selects unit of measure for expressing angles.

RAD—Converts arguments expressed in degrees to radians.

RADIANS—Sets unit of measure for expressing angles to radians.

SIN—Returns sine of its argument.

TAN—Returns tangent of its argument.

### STATISTICS

ADD—Adds coordinates of a data point to data set represented by summary statistics in current statistical array.

CLSTAT—Clears all elements in current statistical array.

CORR—Returns sample correlation coefficient between a specified pair of variables.

DROP—Removes coordinates of a data point from the data set represented by summary statistics in current statistical array.

LR—Specifies current linear regression model and computes intercept and slope for that model.

MEAN—Returns sample mean of specified variable.

PREDV—Returns predicted value of dependent variable.

SDEV—Returns standard deviation of specified variable.

STAT—Selects or creates statistical array.

TOTAL—Returns total of specified variable.

### CONSTANTS

EPS—Returns HP-71's smallest positive, normalized number (1.0 E -499).

INF—Returns machine representation of positive infinity.

MAXREAL—Returns maximum positive finite number that the HP-71 can represent (9.999999999999999E499).

MINREAL—Returns smallest positive number that HP-71 can represent (0.0000000000000001E -499).

NAN—Returns signaling NaN.

PI—Returns 12-digit value representing  $\pi$ .

### STRINGS

&—Concatenation operator.

CHR\$—Converts numeric value into ASCII character.

LEN—Returns length of specified string.

NUM—Returns ASCII numeric code for first character of string.

POS—Returns position of given substring.

STR\$—Returns string representation of value of argument.

UPRC\$—Converts lowercase letters to uppercase.

(Continued on next page)



### HP-71 Functions List (cont.)

VAL—Converts a numeric expression within a string expression to a numeric value.  
VER\$—Indicates versions of system ROMs and LEX files.

#### INPUT/OUTPUT

ASSIGN #—Associates symbolic channel number with specified file and opens that file.  
BEEP—Causes specified tone to sound.  
BEEP OFF—Disables beeper.  
BEEP ON—Enables beeper.  
CONTRAST—Adjusts display contrast.  
COPY—Copies information from source file to destination file.  
CREATE—Creates a data file.  
DATA—Contains data that can be read by READ.  
DELAY—Sets line and character scroll rates in display.  
DISP—Displays numeric and string data.  
DISP USING—Displays items according to specified format.  
DISP\$—Returns string containing all readable characters in display.  
ENDLINE—Specifies end-of-line sequence used in PRINT and PLIST statements.  
ENG—Selects engineering display format.  
FIX—Selects fixed display format.  
GDISP—Sets specified dot pattern in display.  
GDISP\$—Returns 132-character string reflecting dot pattern in display.  
IMAGE—Controls format of displayed and printed output.  
INPUT—Enables assigning values to program variables from keyboard.  
KEYDOWN—Returns 0 or 1, depending on whether key is being pressed.  
LC—Selects between uppercase and lowercase lock on keyboard.  
LINP—Assigns display line to string variable.  
LIST—Displays listing of specified lines in a file.  
ON . . . RESTORE—Selects which DATA statement will be used by next READ statement.  
PLIST—Prints on print device a listing of specified lines in a file.  
PRINT—Causes print list to be sent to print device.  
PRINT USING—Causes print list to be sent to print device according to specified format.

PRINT #—Writes data items to data file in memory.  
PUT—Enters a specified key code into key buffer.  
PWIDTH—Defines line length of PRINT and PLIST statements.  
READ—Assigns values from DATA statements to variables.  
READ #—Reads data items from data file.  
RESTORE—Specifies which DATA statement will be used by next READ operation.  
RESTORE #—Sets specified file pointer to indicated record number.  
SCI—Selects scientific notation display format.  
STD—Selects standard BASIC display format for numbers.  
TAB—Moves DISP or PRINT position ahead to specified column. (Refer to the DISP or PRINT keyword entry.)  
UPRC\$—Converts lowercase letters to uppercase.  
USER—Activates or deactivates user-defined key assignments.  
WIDTH—Defines line length for DISP and LIST statements.  
WINDOW—Sets display window size and location.

#### GRAPHICS

GDISP—Sets specified dot pattern in display.  
GDISP\$—Returns a 132-character string reflecting dot pattern in display.

#### FILE MANAGEMENT

ADDR\$—Returns string representing hexadecimal address of specified file.  
CAT—Gives catalog of file information.  
CAT\$—Returns catalog information for a specified file.  
CLAIM PORT—Returns independent RAM to main RAM status.  
COPY—Copies information from source file to destination file.  
CREATE—Creates a data file.  
EDIT—Assigns "current file" status to specified file.  
FREE PORT—Switches a portion of main RAM to independent RAM status.  
MEM—Returns number of bytes available in memory.  
MERGE—Merges all or part of file into another file.  
NAME—Names system workfile.  
PRIVATE—Limits access to file and restricts changes in protection.

PROTECT—Write-protects one track of a magnetic card.  
PURGE—Deletes file from RAM.  
RENAME—Changes name of file.  
SECURE—Protects file from being altered or purged.  
SHOW PORT—Displays type and size of all plug-in memory devices and independent RAMs.  
TRANSFORM—Transforms BASIC files into TEXT files, or the reverse.  
UNPROTECT—Removes the write-protection from one track of a magnetic card.  
UNSECURE—Clears file access restriction set by SECURE.

#### TIME AND DATE

ADJABS—Performs an absolute adjust on system clock.  
ADJUST—Changes clock time and specifies clock speed correction.  
AF—Returns current value of clock accuracy factor and gives option of setting new adjustment factor.  
DATE—Returns current clock date as an integer (YYDDD).  
DATE\$—Returns current clock date in year/month/day format.  
EXACT—Calibrates system clock and tells HP-71 that time currently stored is the correct time.  
RESET CLOCK—Nullifies effect of executing EXACT.  
SETDATE—Sets date on system clock.  
SETTIME—Sets time on system clock.  
TIME—Returns time of day in seconds since midnight.  
TIME\$—Returns time of day in HH:MM:SS format.

#### SYSTEM SETTINGS AND FLAGS

CFLAG—Clears specified user and/or system flags.  
DEFAULT—Sets math exception traps to specific values.  
DEGREES—Selects degrees as unit of measure for angles.  
DELAY—Sets line and character scroll rates in display.  
DVZ—Returns divide-by-zero flag number (-7).  
FLAG—Returns current value (0 or 1) of specified flag, and optionally selects new flag setting.  
INX—Returns inexact result flag number (-4).

(Continued on next page)



### HP-71 Functions List (cont.)

IVL—Returns invalid operation flag number (–8).  
 OPTION ANGLE—Specifies unit of measure for expressing angles.  
 OPTION BASE—Specifies subscript's lower bound for arrays.  
 OPTION ROUND—Specifies round-off setting.  
 OVF—Returns overflow flag number (–6).  
 RADIANS—Selects radians as unit of measure for angles.  
 RESET—Resets user and system flags and traps to their system default settings.  
 SFLAG—Sets specified user and/or system flags.  
 TRAP—Returns trap for specified flag number and optionally selects new trap setting.  
 UNF—Returns underflow flag number (–5).

### CUSTOMIZATION, KEYBOARD, AND DISPLAY CONTROL

ADDR\$—Returns string representing hexadecimal address of specified file.  
 CHARSET—Specifies alternate character set in ASCII code range of 128 through 255.

CHARSET\$—Returns string representing current alternate character set.  
 CONTRAST—Adjusts display contrast.  
 DEF KEY—Assigns character string to specified key.  
 DELAY—Sets line and character scroll rates in display.  
 DTH\$—Converts decimal number to string representing its five-digit hexadecimal value.  
 FETCH KEY—Displays specified key assignment for editing.  
 FIX—Sets fixed display format and number of fractional digits to be displayed.  
 HTD—Converts string argument representing hexadecimal number to decimal number.  
 IMAGE—Controls format of displayed and printed output.  
 KEY—Assigns character string to specified key.  
 KEY\$—Returns and deletes oldest key or keystroke combination from keyboard buffer.  
 KEYDEF\$—Returns redefined value of a key.  
 KEYDOWN—Returns 0 or 1, depending on whether key is being pressed.

LC—Selects between uppercase and lowercase lock on keyboard.  
 LOCK—Sets password. Causes HP-71 to prompt for that password the next time computer is turned on.  
 PEEK\$—Returns contents of specified section of memory.  
 POKE—Writes to memory at specified hexadecimal address.  
 PUT—Enters a specified code into key buffer.  
 STARTUP—Defines command string to be executed when HP-71 is turned on.  
 USER—Activates or deactivates user-defined key assignments.  
 WINDOW—Sets display window size and location.


### HP-71B ACCESSORIES

- Owner's Manual (00071-90001)
- Reference Manual (00071-90010)
- Quick Reference Guide (00071-90019)
- Blank Overlay Kit (five blank overlays) (HP 82462A)
- 30 Blank Magnetic Card Pack (HP 82707A)
- 100 Blank Magnetic Card Pack (HP 82708A)
- Carrying Case (HP 82461A)
- AC Adapter/Power Supply (HP 82059D)

## HP 82420A HP-71 Memory Module

This module gives you an additional 4K bytes of programmable memory. Up to four modules plug into the front ports on the HP-71 to give you a maximum of 16K bytes of additional RAM.

### HP-71 Memory Configurations

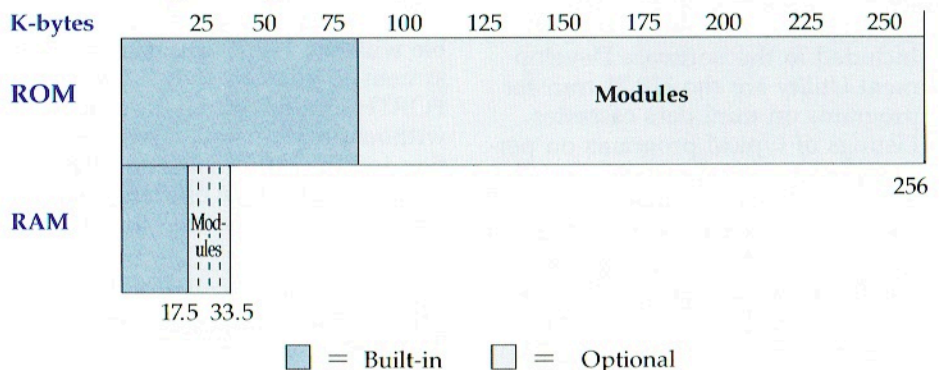

Any combination of up to four ROM and/or RAM modules may be inserted, to a maximum of 256K bytes of memory.



# HP-71 Development System

## The HP-71 – An “Open” Machine

The HP-71 by itself is an extremely powerful machine. Add accessories, peripherals and instruments to further increase and enhance its problem-solving versatility. Hewlett-Packard also provides the tools which allow you to choose and move between languages. Hardware and software developers are encouraged to dig deeper and develop hardware, software and interfaces that will make the HP-71 an indispensable tool for all kinds of applications.

### Software Developers' Handbook (00071-90097)\*

Programmers will find this handbook useful as a timesaver, and as a way to maintain consistency among programs. Some of the subjects covered include user interface, environment preservation, and error trapping.

### Software Development Utility (82440A)

Develop your own HP-71 BASIC, FORTH, or Assembly language source files using a personal computer word processing program. Then transfer the files to the HP-71. Included in the Software Development Utility are the HP-71 transfer programs on mini data cassettes. Listings of typical programs on personal computers that work directly with the HP-71 program to effect the file transfer are also included. Choose your file-transfer option; either HP-IL, HP-IB, or RS-232C. (HP-IL/HP-IB or HP-IL/RS-232C interfaces are required.)



### FORTH/Assembler (82441A)

The FORTH/Assembler ROM provides you with an extended software development environment for your HP-71. The FORTH operating system lets you write application programs in FORTH that execute faster than programs written in BASIC. HP-71 FORTH enhances the FORTH 1983 Standard word capability set with string manipulation words, floating point words and HP-IL words. The FORTH operating system is compatible with the HP-71 BASIC operating system so you can switch between FORTH and BASIC environments without program or data loss; reconfiguring the HP-71 is not necessary. Programs written in one language can execute routines written in the other language.

An assembler, written in FORTH, provides the same command set as the assembler used to develop the HP-71

operating system. Use it to create FORTH primitives, HP-71 binary files, or language extension (LEX) files to extend the BASIC language.

Use the text editor to create and edit text files for use as source files for BASIC, FORTH or Assembly language programs, as well as non-programming related purposes.

A BASIC keyword, KEYBOARD IS, lets you use most terminal devices connected to your HP-71 through an interface as external keyboards and displays for the HP-71. The keyword DISPLAY IS is provided in the HP-IL Interface (HP 82401A).

\*Available from the Users' Library, and includes media.



## HP-71 Internal Design

Hewlett-Packard encourages software and hardware developers to delve deeper into the HP-71. To support these efforts, the internal specifications of the HP-71 have been documented and are available. The information includes details on the internal operation, entry points into the operating system, source code listings, an HP-IL interface description, and hardware bus specifications.

### The Internal Design Specifications (IDS) Documents

Different aspects of HP-71 internal operation are covered in each specification document.

#### Volume I: Detailed Design Description (00071-90068)

- System Start-up and Memory Configuration
- Memory Structure
- System Control
- The BASIC Interpreter
- Language Extension and Binary Files
- BASIC File Considerations

- Statement Parse, Decompile, and Execution
- Utilities
- Message Handling
- File System
- Table Formats
- Internal Data Representation
- Numeric Computation Algorithms
- Clock System
- HP-71 Assembler Instruction Set
- HP-71 Code Examples
- HP-71 Resource Allocation

#### Volume II: Entry Point and Poll Interfaces (00071-90069)

- Documents entry and exit conditions of 25 categories of supported system entry points.
- Documents interfaces to operating system polls of LEX files.
- Index of entry point names and global symbol values.

#### Volume III: Operating System Source Listings (00071-90070)

- Full assembly listings of the 76 modules that comprise the HP-71 64K byte operating system.

## HP-IL Internal Design Specifications (82401-90023)

- Internal Design Notes
- Extended Command Syntax
- Examples of HP-IL Operation
- I/O Processor Firmware Specification
- HP-IL Poll Interfaces
- HP-IL ROM Utility Routines
- HP-IL LEX File Source Listings

## Hardware Design Specifications (00071-90071)

- Describes each bus line and its purpose; specifications and schematic diagrams are included.
- Describes the CPU (from a hardware perspective).
- Includes case dimension diagrams.



# Hewlett-Packard Enhancements

## HP-IL

The Hewlett-Packard Interface Loop (HP-IL) is a bit-serial interface designed for low cost, battery-operable systems. HP-IL lets you use your HP-41 or HP-71 as system controller, capable of transmitting and receiving data, and performing a wide variety of information management and instrument control functions. In this system, devices are connected by two-wire cables leading from the output port of one device to the input port of the next, until all devices form a closed loop. This loop structure provides a unique capability through auto address assignment, device capability identification, power ON/OFF control and error checking.

Several HP-IL peripherals support STANDBY mode, allowing you to power the peripherals on or off, under program control, to conserve battery life. The power ON/OFF feature lets you use an HP-IL system for remote applications.

## HP 82160A HP-41 HP-IL Interface Module

The HP-IL Interface Module plugs into any one of the four ports in the HP-41 connecting your advanced calculator with the extensive family of HP-IL peripherals and instruments. The module gives your HP-41 simultaneous control of up to 30 devices on the loop. There are three function sets supplied by the HP-IL Module: printer, mass storage, and general input/output (I/O).

### Features

- Battery powered.
- Simple connector system.
- Auto addressing.
- Manual addressing.
- Device-powered loop.
- Automatic error checking.
- Bit-serial, loop structure.
- STANDBY mode.
- Common mode rejection.

### Benefits

Completely field portable. Runs during power failure.

Keyed cables for easy, error-free connection.

Devices can be connected in any order.

Control of two similar devices can be determined programmatically.

Each device powers its section of loop, allowing 30 devices and up to 10 meters between devices (up to 100 meters with twisted, shielded pairs).

Assures that the message sent was received correctly.

Allows automatic error checking.

Conserves battery life as programs control power up/power down.

Eliminates unwanted voltage transients.

### Physical Specifications

**DIMENSIONS** . . . 2.8 cm (1.1 in) x 1.2 cm  
(0.5 in) x 0.4 cm (0.2 in)

**WEIGHT** . . . . . 42.5 g (1.5 oz)

**CABLE LENGTH**  
(two attached  
cables) . . . . . 80 cm each (31 in each)

### OPERATING REQUIREMENTS

Operating  
temperature . . . 0° to 45°C (32° to 113°F)

Storage  
temperature . . . -40° to 75°C (-40° to  
167° F)

### DATA TRANSFER RATE

150 bytes per second

### HP-IL Module Functions List

#### PRINTER OPERATIONS

ACA—Accumulate ALPHA register into print buffer.

ACCHR—Accumulate character into print buffer.

ACCOL—Accumulate column into print buffer.

ACSPEC—Accumulate special character into print buffer.

ACX—Accumulate X-register into print buffer.

ADV—Advance paper, print the print buffer right-justified.

BLDSPEC—Build special character.

FMT—Accumulate format specifier into print buffer.

LIST—List program lines.

PRA—Print ALPHA register.

PRAXIS—Print y-axis.

PRBUF—Print buffer left-justified.

PRFLAGS—Print flags and other status information.

PRKEYS—Print reassigned keys.

PRP—Print program.

PRPLOT—Plot function interactively.

PRPLOTN—Plot function noninteractively.

PRREG—Print registers.

PRREGX—Print registers as directed by X.

PRΣ—Print statistics registers.

PRSTK—Print stack.

PRX—Print X-register.

REGPLOT—Plot single line using data in registers.

SKPCHR—Skip characters, accumulate in print buffer.

SKPCOL—Skip columns, accumulate in print buffer.

STKPLOT—Plot single line using data in stack.



## HP 82160A HP-IL

### Interface Function List (cont.)

#### MASS STORAGE OPERATIONS

CREATE—Create new file with zero values.  
DIR—Display or print a directory of stored files.  
NEWM—Initialize medium.  
PURGE—Remove file from medium.  
READA—Read "write-all" file.  
READK—Read key-assignment file and reassign keys.  
READP—Copy program file, replacing last program in memory.  
READR—Copy data file into HP-41 registers.  
READRX—Copy part of data file according to X-register.  
READS—Read status file and set calculator status.  
READSUB—Copy program file after last program in memory.  
RENAME—Rename stored file.

SEC—Secure a stored file.  
SEEKR—Position medium to specified file data register.  
UNSEC—Unsecure a stored file.  
VERIFY—Verify that a stored file can be read.  
WRTA—Store "write-all" file onto medium.  
WRTK—Store key assignments onto medium.  
WRTP—Store program onto medium.  
WRTPV—Store program onto medium and make file private.  
WRTR—Copy all storage registers into data file.  
WRTRX—Copy some storage registers according to X-register.  
WRTS—Store calculator status onto medium.  
ZERO—Fill data file with zero values.

#### INTERFACE CONTROL OPERATIONS

AUTOIO—Set interface to Auto mode.  
FINDID—Find address of selected device.

INA—Input ALPHA string from selected device.  
IND—Input decimal number from selected device.  
INSTAT—Input status information from selected device.  
LISTEN—Set device as a listener, or remove all listeners.  
LOCAL—Set selected device to local mode.  
MANIO—Set interface to Manual mode.  
OUTA—Output ALPHA string to selected device.  
PWRDN—Set all devices to low power state.  
PWRUP—Set all devices to operating power state.  
REMOTE—Set selected device to remote mode.  
SELECT—Select device as primary device.  
STOPIO—Stop I/O communication in loop.  
TRIGGER—Trigger all devices set to respond.

## HP 82401A

### HP-71 HP-IL Interface

The HP-71 HP-IL Interface plugs into a specially designed port at the upper left corner of your HP-71, establishing a link to the world of instruments and peripherals. Connect directly to any HP-IL product, and to HP-IB, RS-232C and GPIO interfaces using converters.

The HP-IL Interface gives your HP-71 simultaneous control of up to 30 devices on the loop, and through secondary addressing, up to 930 devices. The 16K bytes of ROM in the Interface provide for printer, display, mass storage and general input/output (I/O) operations. Multiple HP-71s can be connected on the interface loop.

#### Physical Specifications

**DIMENSIONS** . . . 5.2 cm (2 in) x 3.7 cm  
(1.5 in) x 1.3 cm (.5 in)

**WEIGHT** . . . . . 18 g (.7 oz)

#### OPERATING REQUIREMENTS

Operating temperature . . . 0° to 45°C (32° to 113°F)

Storage temperature . . . -40° to 55°C (-40° to 131° F)

Relative humidity . . . . . 0 to 95%

#### DATA TRANSFER RATE

5,000 bytes per second

#### HP-IL INTERFACE FUNCTIONS LIST

##### SYSTEM SETUP

ASSIGN IO—Associates assign codes with HP-IL devices.  
LIST IO—Lists all defined assign codes and their HP-IL addresses.  
OFF IO—Suspends I/O operation.  
RESET HPIL—Resets the HP-IL interface to a known condition.  
RESTORE IO—Enables I/O operations to occur on HP-IL.

##### PRINTER AND DISPLAY OPERATIONS

DISPLAY IS—Assigns one HP-IL device to be the display device.

PRINTER IS—Assigns one HP-IL device to be used for all printing operations.

#### MASS STORAGE OPERATIONS

ASSIGN #—Associates an I/O channel number with a file and opens the file.  
CAT—Gives a catalog of file information.  
CAT\$—Returns a string containing catalog information.  
CHAIN—Purges current file, copies specified file into RAM, and executes it.  
COPY—Copies a file from one location to another.  
CREATE—Creates a data file.  
INITIALIZE—Initializes a mass storage medium.  
PACK—Packs directory and storage space on a medium.  
PACKDIR—Packs only directory space on a medium.  
PRIVATE—Permanently prevents a file from being changed or inspected.  
PURGE—Deletes a file.  
RENAME—Changes the name of a file.  
RUN—Copies specified file into RAM and executes it.  
SECURE—Prevents a file from being altered or purged.  
TRANSFORM—Creates new TEXT file from BASIC file, or new BASIC file from TEXT file.  
UNSECURE—Cancels security for a file.

(Continued on next page)



### HP 82401A HP-IL Interface Functions List (Cont.)

#### GENERAL I/O OPERATIONS – DATA TRANSFER

ENTER—Reads data from HP-IL into numerical and string variables.

OUTPUT—Sends data from numeric and string expressions to HP-IL.

#### GENERAL I/O OPERATIONS – HP-IL INTERACTION

CLEAR—Clears an individual HP-IL device or all HP-IL devices.

DEVADDR—Returns the address of a device.

DEVAID—Returns the accessory ID of a device.

DEVID\$—Returns a string containing the device ID of a device.

ENABLE INTR—Specifies the events that can cause an HP-IL interrupt.

LOCAL—Sets an individual HP-IL device or all HP-IL devices to Local mode.

LOCAL LOCKOUT—Sets all HP-IL devices to Local Lockout condition.

OFF INTR—Cancels HP-IL interrupt branching.

ON INTR—Defines how a program branches when an enabled HP-IL interrupt event occurs.

READDDC—Returns the number of the last HP-IL device-dependent command message received.

READINTR—Returns the value of the interrupt-cause byte.

REMOTE—Enables all HP-IL devices to change to Remote mode and can also set an individual HP-IL device to Remote mode.

REQUEST—Defines the HP-71 status byte that is sent when serially polled by an HP-IL controller.

SEND—Sends individual HP-IL messages on the loop.

S POLL—Returns a value that represents one or more status bytes from an HP-IL device.

STANDBY—Sets the HP-IL timeout period and verify interval.

STATUS—Returns the HP-IL interface status.

TRIGGER—Triggers an event at an HP-IL device.

#### GENERAL I/O OPERATIONS – PASSING CONTROL

CONTROL OFF/ON—Sets the controller status of the HP-71.

PASS CONTROL—Gives control of the HP-IL system to another device.

#### BINARY FUNCTIONS

BINAND—Returns the value of the binary AND operation.

BINCMP—Returns the value of the binary complement.

BINEOR—Returns the value of the binary Exclusive-OR operation.

BINIOR—Returns the value of the binary Inclusive-OR operation.

BIT—Returns the value of one bit of an integer.

## HP 82182A Time Module

(Built into the HP-41CX, optional for the HP-41CV.)

The Time Module expands your HP-41 system with time information and time-controlled operations. Using the quartz-crystal controlled Time Module, your HP-41 can become the heart of a time-based system controller, an alarm clock, an appointment reminder, a calendar, a timer, even an advanced stopwatch.

### Physical Specifications

**DIMENSIONS** . . . 3.2 cm (1.3 in) x 1.0 cm  
(0.4 in) x 2.9 cm (1.2 in)

### OPERATING REQUIREMENTS

Operating

temperature . . . 0° to 45°C (32° to 113°F)

Storage

temperature . . . -20° to 65°C (-4° to 149° F)

### Time Module Functions List

#### REAL TIME AND DATE

ADATE—Append number to ALPHA register as a date.

ATIME—Append number to ALPHA register as a time.

ATIME24—Append number to ALPHA register in a 24-hour time format.

CLK12—Switch to 12-hour time display format.

CLK24—Switch to 24-hour time display format.

CLKTD—Switch clock to time and date display.

CLOCK—Display the clock.

CORRECT—Set time and adjust accuracy factor.

DATE—Place number for current date in X-register.

DMY—Switch date format to Day-Month-Year.

MDY—Switch date format to Month-Day-Year.

RCLAF—Recall clock accuracy factor.

SETAF—Set clock accuracy factor.

SETDATE—Set clock date.

SETTIME—Set clock time.

TIME—Place current time number in X-register.

T + X—Adjust clock time by specified factor.

■ON—Display the clock.

### CALENDAR FUNCTIONS

DATE + —Calculate new date from date and number of days.

DDAYS—Calculate days difference between two dates.

DOW—Replace a date number with a Day-of-Week number.

### STOPWATCH

RCLSW—Place stopwatch time in X-register.

RUNSW—Run stopwatch.

SETSW—Set stopwatch to specified starting time.

STOPSW—Stop running stopwatch.

SW—Set the calculator to Stopwatch mode.

### ALARMS

XYZALM—Set alarm.

ALMCAT—Provide listing of alarms.

ALMNOW—Activate past due label alarms.



## HP 82184A Plotter Module\*

The 8K-byte Plotter Module fits easily into one of the HP-41's four ports to give you bar code generation and plotting capabilities. The Plotter Module enables you to use your HP-41 computer with the

HP 7470A Graphics Plotter. It also allows your HP-41 to print HP bar code using the HP 82162A Thermal Printer/Plotter or the HP 7470A Graphics Plotter. Take advantage of ready-to-go bar code generation programs or write your own.

The Plotter Module also helps you produce high-quality plots on HP's

low cost HP 7470A Graphics Plotter. This module contains 52 plotter functions to help you design your own programs. There is also a utility plotting program that enables you to produce framed, labeled plots, such as line and bar charts, without having to learn specific plotter functions.

### Physical Specifications

**DIMENSIONS** . . . 3.2 cm (1.3 in) x 1.0 cm  
(0.4 in) x 2.9 cm (1.2 in)

### OPERATING REQUIREMENTS

#### Operating

temperature . . . 0° to 45°C (32° to 113°F)

#### Storage

temperature . . . -20° to 65°C (-4° to 149° F)

### HP 82184A Plotter Module Functions List

#### GENERAL PLOTTING FUNCTIONS

CLIPUU—Specifies plot bounds in user units.

CSIZE—Sets character space height.

CSIZEO—Sets character space height, aspect ratio, and slant.

DGTIZE—Identifies coordinates of current pen position.

DRAW—Draws line to point (x,y).

FRAME—Frames active plotting area.

GCLEAR—Advances page on plotters that have a page feed mechanism.

IDRAW—Draws line to a point x and y units from current point.

IMOVE—Moves pen to a point x and y units from current point.

LABEL—Prints contents of the ALPHA register.

LDIR—Sets angle of rotation for printing labels.

LIMIT—Sets graphics limits in millimeters.

LOCATD—Sets plot bounds by digitizing two opposite corners.

LOCATE—Sets plot bounds in graphics units.

LORG—Sets label origin position.

LTYPE—Selects line type.

LTYPEO—Selects line type and length of repeat pattern.

LXAXIS—Draws and labels x-axis.

LYAXIS—Draws and labels y-axis.

MOVE—Moves pen to point (x,y).

PCLBUF—Clears I/O buffer.

PDIR—Rotates axes for incremental and relative plotting.

PEN—Selects pen.

PENDN—Lowers pen.

PENUP—Lifts pen.

SCALE—Sets user scale.

SETGU—Switches module to graphics units mode.

SETUU—Switches module to user units mode.

TICLEN—Sets tick lengths.

UNCLIP—Resets plot bounds to graphic limits.

WHERE—Enters coordinates of last point and current pen status.

XAXIS—Draws x-axis.

XAXISO—Draws x-axis with ticks.

YAXIS—Draws y-axis.

YAXISO—Draws y-axis with ticks.

IPLOT—Moves or draws to a point x and y units from current point.

PLOT—Moves or draws to point (x,y).

PLREGX—Moves or draws to series of coordinate points stored in data registers.

RPOINT—Moves or draws a point (x,y) relative to an assumed origin.

BC—Plots a row of HP-41 bar code.

BCA—Creates bit pattern for Alpha-Replace bar code.

BCAA—Creates bit pattern for Alpha-Append bar code.

BCKSM—Computes checksum of bit pattern in ALPHA register.

BCO—

Plotter Option: Plots bar code row having user-specified leading and trailing bars.

Printer Option: Prints a row of HP-41 bar code on HP 82162A Thermal Printer/Plotter.

BCP—Generates bit pattern for program row.

BCREGX—Generates bit pattern from data in a series of storage registers.

BCSIZE—Calibrates module to pen width and sets HP or non-HP bar code type.

BCX—Creates bit pattern for nonsequenced bar code.

BCXS—Creates a bit pattern for sequenced bar code.

#### UTILITY PLOTTING FUNCTIONS

NEWPLOT—Initializes module for generating a plot.

PLANOT—Annotates plot according to NEWPLOT and REPOINT parameters.

PLINIT—Initializes module for plotting from NEWPLOT and REPOINT parameters.

PLTUXY—Generates a function or data plot according to NEWPLOT and REPOINT parameters.

REPOINT—Prompts for plot generation or parameter editing.

X?—Prompts for next x-coordinate.

Y?—Prompts for next y-coordinate.

\*For use with HP-IL and HP-IB options of the HP 7470A plotter.



## HP 82183A Extended I/O Module\*

The HP 82183A provides easy-to-use I/O functions that enhance the HP-41's control of the HP-IL loop. This 4K-byte module provides 59 functions that extend the I/O capabilities beyond those provided by the HP 82160A HP-IL Module. These functions enhance mass storage, character manipulation, HP-IL control and advanced control of the HP-41 and devices on the loop.

### Physical Specifications

**DIMENSIONS** . . . 3.2 cm (1.3 in) x 1.0 cm  
(0.4 in) x 2.9 cm (1.2 in)

### OPERATING REQUIREMENTS

Operating temperature . . . 0° to 45°C (32° to 113°F)  
Storage temperature . . . -20° to 65°C (-4° to 149° F)

### Extended I/O Module Functions List

#### MASS STORAGE OPERATIONS

**COPYFL**—Copies nonprivate file (named in ALPHA) from master device to device addressed by number in X.  
**DIRX**—Returns to ALPHA file name whose position in primary medium's directory is specified by number in X.  
**FLENG**—Places in X the length of the file specified in ALPHA.  
**FLTYPE**—For file named in ALPHA, places in X a two-character ALPHA string representing file type.  
**MCOPY**—Copies contents of master medium onto all other media.  
**MCOPYPV**—Same as **MCOPY**, except all HP-41 program files are made private.  
**MVERIFY**—Checks each mass storage device to verify number of records specified in X can be read without error.

#### CHARACTER MANIPULATION FUNCTIONS

**ALENGIO**—Places in X the length of current ALPHA string.  
**ANUMDEL**—Returns to X the value of a number represented by a string of numerical character in ALPHA register.  
**ATOXL**—Removes first character from ALPHA and places in X the corresponding character code.  
**ATOXR**—Places character code of last character of ALPHA string into X and deletes that character from string.  
**ATOXX**—Places number in X with code for character in ALPHA position indicated by that number.  
**X<>FIO**—Exchanges value in X with decimal equivalent of binary value represented by flags 00 through 07.

**XTOAL**—Adds to left of first non-null character in ALPHA the character corresponding to character code in X.  
**XTOAR**—Appends to end of current string in ALPHA the character corresponding to character code in X.  
**YTOAX**—Replaces character in ALPHA with another character specified by character code in Y.

#### HP-IL CONTROL FUNCTIONS

**AID**—Places in X the accessory ID of primary device.  
**CLRDEV**—Resets primary device to its initial state.  
**CLRLOOP**—Simultaneously clears all devices on loop.  
**DEVL**—Sends to primary device the Device-Dependent Listener command number specified in X.  
**DEVT**—Sends to primary device the Device-Dependent Talker command number specified in X.  
**FINDAID**—Uses accessory ID to locate device of specific class or type.  
**ID**—Returns to ALPHA a string containing ID of primary device.  
**POLL**—Sends Identify message around loop and indicates loop's response by displaying a number from 0 to 255.  
**POLLD**—Disables parallel poll response of primary device.  
**POLLE**—Enables primary device to respond to a parallel poll.  
**POLLUNC**—Disables parallel poll responses of all devices.  
**RCLSEL**—Returns HP-IL address specified by most recent execution of **SELECT**.  
**SRQ?**—Tests loop for service request by sending HP-IL Identify message.  
**STAT**—Reads up to 23 bytes of status from primary device and stores these bytes as character string in ALPHA.  
**XFER**—Until End of Transmission message received, transfers data from primary device to the device specified by the HP-IL address in X.  
**XFERC**—Transfers data from primary device to device specified by HP-IL address in X.  
**XFERCL**—Transfers data from primary device to device specified by address in X.

\*For use with HP-41 Advanced Calculators.

(Continued on next page)



#### HP 82183A Extended I/O Functions List (cont.)

XFERE—Transfers number of bytes specified by address in X.  
XFERN—Transfers number of bytes specified in Y from primary device to device at address specified by value in X.

#### ADVANCED CONTROL FUNCTIONS

ADROFF—Disables the automatic loop addressing and talker/listener commands used by data transfer functions.  
ADRON—Enables the automatic loop addressing and talker/listener commands used by data transfer functions.  
DDL—Sends Device-Dependent Listener command message specified by value in X to all active listeners.  
DDT—Sends Device-Dependent Talker message specified by value in X to currently active talker.  
INAC—Replaces contents of ALPHA with string of bytes from primary device.

INACL—Replaces ALPHA contents with a dummy "D" character and a string of bytes from primary device.  
INAE—Replaces ALPHA contents with string of bytes from primary device.  
INAN—Replaces ALPHA contents with a string of up to 23 bytes from primary device, and terminates string with dummy "D" character.  
INP—Causes primary device to send to HP-41 a series of bytes that the HP-41 can translate into a program.  
INXB—Directs primary device to send one byte of data to X.  
LAD—Switches to listener the device specified by HP-IL address in X.  
LOCK—If primary device has remote override switch (for manually placing device into Local mode), disables this switch.  
NLOOP—Places value in x indicating number of devices currently on HP-IL, excluding HP-41 itself.  
NOTREM—Returns devices having Remote and Local modes to Local mode control, disables not-remote-enabled state.

OUTAC—Sends all but first non-null character in ALPHA string to device.  
OUTACL—Sends string in ALPHA—minus first non-null character—to primary device.  
OUTAE—Sends ALPHA string—minus first non-null character—to primary device.  
OUTAN—Transmits to primary device up to 23 ALPHA characters, as specified by value in X.  
OUTP—Sends from HP-41 to primary device the program containing the global label in ALPHA.  
OUTXB—Sends to primary device the eight-bit byte equivalent of decimal byte value in X.  
SEND—Sends to primary device the command message specified by command number in X.  
TAD—Switches to talker the device specified by HP-IL address in X.  
UNL—Removes all currently addressed listeners from listener status.  
UNT—Removes current talker from talker status.

## HP-41 Automatic Start and Cassette Duplication Module (00041-15042)

The automatic start feature provides a means of writing "fool-proof"

HP-41 programs. With the automatic start module installed, the HP-41 goes through a special sequence when it is turned on. This sequence lets you write programs that automatically set status, configure memory, access peripherals, or prompt the user. The mass copy

feature provides an easy-to-use means of duplicating programs and data. Use it to copy information from cassette to cassette, cassette to HP 9114A disc, and from disc to disc. The information on one HP 82161A Digital Cassette Drive can be copied onto as many as 29 other cassettes.

## HP-41 HP-IL Development Module (00041-15043)

Adding a second HP-41 to the HP-IL loop becomes a possibility with the aid of the HP-41 HP-IL Development Module. In Scope mode, a second HP-41 can be used for displaying the mnemonics of HP-IL messages as they travel around the loop. Giving direct access to the HP-IL integrated circuit, the Development Module allows you to change the contents of any control register and

poll certain status bits. Characters can be inserted at, or removed from, any position in the Alpha register.

#### Features

- Alpha register functions.
- I/O buffer.
- Direct access to HP-IL integrated circuit.

#### Benefits

- Add or remove characters from any position in the Alpha register.
- Circumvents the loss of characters with byte values of zero.
- Change the contents of any control register and poll certain status bits.



# Hewlett-Packard HP-41 Peripherals

## HP 82104A Card Reader

The HP-41 Card Reader is a valuable peripheral that lets you save programs and data on small magnetic cards. This "smart" Card Reader keeps track of cards as they are read and it even prompts you for the next card. A security feature permits a program to be run, but not reviewed or altered through normal operations. An added bonus is that it also accepts program cards from the HP-67 and HP-97 calculators, automatically making the necessary translations into HP-41 code.

### Features

- Powered by HP-41's batteries.
- 224-byte magnetic cards.
- Uses one HP-41 port.
- Reads both HP-67/97 and HP-41 magnetic cards.
- Writes contents of HP-41 registers onto cards.
- Fits inside the HP-41 carrying case.

### Benefits

Allows small size, total portability.

Programs and data easily modified. Cards easily stored. Easy to write contents on card's face. Inexpensive to duplicate.

Leaves other ports free for peripherals, modules, application ROMs and HP-IL interfacing.

Thousands of Users' Library programs available.

Can record programs and data on space-saving magnetic cards for inexpensive off-line mass storage.

Compact, convenient, protected.

### Physical Specifications

**DIMENSIONS** . . . 7.4 cm (3.0 in) x 7.9 cm  
(3.2 in) x 3.6 cm (1.4 in)

**WEIGHT** . . . . .92 g (3.2 oz)

#### COMPATIBILITY

Plugs into the HP-41, also reads HP-67/97 magnetic cards.

#### OPERATING REQUIREMENTS

**Voltages** . . . . .regulated 6 Vdc supplied by HP-41. Unregulated 6 Vdc supplied by HP-41 batteries.

**Current** . . . . .2 mA maximum (no card inserted)  
200 mA maximum (card inserted, motor off)  
500 mA maximum (card inserted, motor on)

**Operating temperature** . . .10° to 45°C (50° to 113°F)

**Storage temperature** . . . -40° to 75°C (-40° to 167° F)

### HP-41 MAGNETIC CARDS

**DIMENSIONS** . . . 7.11 cm (2.8 in) x 1.14 cm  
(0.45 in) x 0.003 cm  
(0.008 in)

**WEIGHT** . . . . .0.258 g (0.001 oz) per card  
00097-13141—40 Card Pac  
00097-13143—120 Card Pac  
00097-13206—1000 Card Pac without holder

#### STORAGE

**CAPACITY** . . . .16 registers (112 bytes)  
per track  
2 tracks per card

#### READ/WRITING

**SPEED** . . . . .6.35 cm/sec (2.5 in/sec)

### HP 82104A Card Reader

#### Functions List

#### HP-41 FUNCTIONS

MRG—Merge program from card.  
RDTA—Read data card.  
RDTAX—Read data card as directed by X.  
RSUB—Read subroutine.  
VER—Verify track.

WALL—Write all.  
WDTA—Write data card.  
WDTAX—Write data card as directed by X.  
WPRV—Write private program card.  
WSTS—Write status card.

#### HP-67/97 COMPATIBLE FUNCTIONS

7CLREG—Clear registers.  
7DSP0 through 7DSP9—Display 0 through 9 decimal places.  
7DSZ—Decrement and skip on zero.  
7DSZI—Decrement and skip on zero indirect.  
7ENG—Engineering notation.  
7FIX—Fixed notation.  
7GSBI—Go to subroutine indirect.  
7GTOI—Go to label indirect.  
7ISZ—Increment and skip on zero.  
7ISZI—Increment and skip on zero indirect.  
7P<>S—Exchange primary and secondary register contents.  
PRREG—Print registers.  
7PRSTK—Print stack.  
7PRTZ—Print X.  
7RCLΣ—Recall contents of statistics registers.  
7SCI—Scientific notation.



## HP 82143A Printer/Plotter

The HP 82143A Printer/Plotter is a whisper-quiet, battery-operable thermal printer that easily plugs into the HP-41. It gives you numeric, upper- and lowercase alpha, double-wide characters, plotting capability and intensity control for optimum contrast and readability. It even lets you define your own "special" characters. Portable and lightweight, the Printer/Plotter operates on batteries. The batteries can be recharged with the

### Features

- Battery powered.
- 24-character print line size.
- Single- and double-wide characters.
- Automatic right and left justification and centering.
- 128-character set.

### Benefits

- Allows complete portability.
- Makes smaller print possible.
- Highlight output.
- Format control.
- More precise communication.

HP 82059D AC Recharger that is included with the product. The Printer/Plotter is a valuable aid in

editing programs, checking long calculations, or presenting results in graphics form.

### Physical Specifications

**DIMENSIONS** . . . 17.8 cm (7.0 in) x 13.2 cm (5.2 in) x 6.1 cm (2.4 in)

**WEIGHT** . . . . . 808 g (1.8 lbs) (includes paper and battery)

**CABLE LENGTH** 86 cm (34 in)

#### POWER REQUIREMENTS

**Battery** . . . . . four-cell, 4.4 to 6 volt, quick-charge, nickel-cadmium battery pack

**Battery current,**  
(worst case) . . . 250 mA (idle), 5 A (printing)

**Recharging**  
**time** . . . . . 14 to 16 hours (printer/plotter ON or OFF)

**Operating time** . . . 3 to 6 hours

#### CHARACTER SETS

96 standard ASCII  
127 modified-expanded ASCII

#### SPECIAL MODES

Column, Double wide, Single wide

#### PRINT FORMAT

24 standard characters, 12 double-wide characters, 168 dot-columns per line  
Upper- and lowercase letters

Special-character generation  
Plotting capabilities  
Graphics capabilities  
43-character buffer

#### PRINTING

**SPEED** . . . . . 24 characters/sec

#### OPERATING REQUIREMENTS

**Operating**  
**temperature** . . . 0° to 45°C (32° to 113°F)

**Charging**  
**temperature** . . . 15° to 40° C (59° to 104° F)

**Storage**  
**temperature** . . . -40° to 55°C (-40° to 131° F)

**Humidity** . . . . . 10% to 90% (non-condensing) at 40° C

#### THERMAL PAPER

**Width** . . . . . 5.7 cm (2.2 in)

**Roll length** . . . . . 25 m (80 ft)

**Colors** . . . . . blue, black  
6 rolls/box

#### INTERFACE

Plugs into the HP-41 calculator, unique.

### HP 82143A Printer

#### FUNCTIONS LIST

ACA—Accumulate ALPHA register.

ACCCHR—Accumulate character.

ACCOL—Accumulate column.

ACSPEC—Accumulate special character.

ACX—Accumulate X-register.

ADV—Advance paper.

BLDSPEC—Build special character.

LIST—List program lines.

PRA—Print ALPHA register.

PRAXIS—Print axis.

PRBUF—Print buffer.

PRFLAGS—Print flags and status information.

PRKEYS—Print reassigned keys.

PRP—Print program.

PRPLOT—Plot function interactively.

PRPLOT—Plot function noninteractively.

PRREG—Print registers.

PRREGX—Print registers as directed by X.

PRΣ—Print statistics registers.

PRSTK—Print stack.

PRX—Print X-register.

REGPLOT—Plot single line using data in registers.

SKPCHR—Skip characters, accumulate in print buffer.

SKPCOL—Skip columns, accumulate in print buffer.

STKPLOT—Plot single line using data in stack.



## HP 82153A Optical Wand

The HP 82153A Optical Wand makes using the HP-41 even faster and easier. Plug the Wand into one of the HP-41 ports, and load programs and data into memory by passing the Wand across a printed page of bar code. The Wand translates the information into HP-41 programs and data, and then loads it into the HP-41. Bar code is an inexpensive distribution medium for programs

### Features

- Reads special HP-41 bar code.
- Plugs into and powered by the HP-41.
- Inexpensive bar code.

### Benefits

Makes low cost and high reliability possible.  
Economical data entry and processing.  
Portable.  
Minimizes software distribution expense.

and data. Store your bar code sheets in a three-ring binder if you choose. And share your programs quickly and easily—just photocopy and

distribute. To make your own bar code, refer to the Plotter Module on page 21.

### Physical Specifications

**DIMENSIONS** . . . 13.0 cm (5.1 in) x 2.3 cm (0.9 in)

**WEIGHT** . . . . . 55 g (1.9 oz)

**CABLE LENGTH** . . 81.3 cm (32 in)

#### INTERFACE

Plugs into the HP-41 Calculator, reads HP-41 bar code only.

#### OPERATING REQUIREMENTS

**Voltages** . . . . . regulated 6 Vdc supplied by the HP-41. Unregulated 6 Vdc supplied by HP-41 batteries.

**Current** . . . . . 2  $\mu$ A maximum (read switch off, computer off)  
65 mA maximum (read switch on, computer on)

**Operating temperature** . . . 0° to 45°C (32° to 113°F)

**Storage temperature** . . . -20° to 65°C (-4° to 149° F)

#### OPERATING LIMITS

**Scan angle** . . . . . within 25° of perpendicular (10° to 20° optimum)

**Scan speed** . . . . . 7.6 to 76 cm/sec (3 to 30 in/sec)

Subject to electro-magnetic interference.

### HP 82153A Wand

#### FUNCTIONS LIST

WNDDTA—Scan one row of data bar code.  
WNDDTX—Scan and store data bar code as directed by X.

WNDLNK—Scan and execute bar coded subroutine.

WNDSUB—Scan bar coded subroutine.

WNDESCN—Scan row of specialized bar code.

WNTST—Scan bar code to test for correct reads.



# Hewlett-Packard HP-71 Peripherals

## HP 82400A Card Reader

The HP 82400A magnetic Card Reader offers an inexpensive means of storage for your programs and data. Snap it into a specially designed slot; the card reader will not change the external dimensions of the HP-71.

Encode your cards as a private file so that they can be copied and executed, but not viewed or edited. Automatic verification assures the accuracy of the information on the cards. And, simple encoding protects your cards from being overwritten.

### Features

- Powered by HP-71 batteries.
- Snaps into a special slot.
- 1.3K-byte magnetic cards.
- Fits inside the HP-71 carrying case.

### Benefits

Allows small size and maximizes portability.

Leaves RAM/ROM ports free for memory and software modules. Outside dimensions of the HP-71 don't change.

Programs and data are easily stored and modified. Cards are inexpensive to duplicate. Label contents on face of card. Store easily in a small space.

Compact, convenient, protected.

### Physical Specifications

**DIMENSIONS** . . . 5.3 cm (2.1 in) x 2.8 cm  
(1.1 in) x 2.2 cm (.9 in)

**WEIGHT** . . . . . 23 g (.8 oz)

#### COMPATIBILITY

Snaps into the HP-71. Cards are the same dimensions as those used in the HP-75; however, programs are not interchangeable.

### OPERATING REQUIREMENTS

#### Supply

voltage . . . . . 4.25 to 6.5 volts

Current . . . . . 7 mA (RUN mode)  
18 mA (WRITE mode)  
1 mA (STANDBY mode)

#### Operating

temperature . . . 0° to 45° C (32° to  
113° F)

#### Storage

temperature . . . -40° to 65°C (-40° to  
149° F)



# Hewlett-Packard

## HP-41/HP-71 HP-IL Peripherals

### HP 82161A Digital Cassette Drive

The Digital Cassette Drive uses a digital-quality mini-cassette, capable of storing up to 128K bytes of information. Files can be located easily by name on the cassette drive. Rewind time is under 30 seconds and it can access over 250 bytes of information per second. All tape movement is under microprocessor control, unlike the more common audio cassette drives that must be operated manually. The HP 82161A can locate files when under program control. It also features STANDBY mode, enabling

Features	Benefits
• Battery powered.	Take it anywhere.
• 128K bytes per cassette.	Large storage capacity.
• Variable record length, file-by-name organization, tape directory.	Access data quickly and easily; save file space.
• Internal buffer space.	Minimizes tape motion, access time.
• STANDBY mode.	HP-IL controller can turn drive on or off from a remote location; conserves battery power.

an HP-IL controller to turn the Drive on or off remotely. This unique feature helps extend system battery life and allows for system operation in remote applications.

Physical Specifications	DATA FORMAT	OPERATING REQUIREMENTS
<b>DIMENSIONS</b> . . . 17.8 cm (7.0 in) x 13.2 cm (5.2 in) x 6.1 cm (2.4 in)	Number of tracks . . . 2	Operating temperature . . . 10° to 40°C (50° to 104°F)
<b>WEIGHT</b> . . . . . 798 g (1.8 lbs)	Density . . . . . 335 bits/centimeter (850 bits/in)	Charging temperature . . . 15° to 40° C (59° to 104° F)
<b>POWER REQUIREMENTS</b>	Format . . . . . 256 bytes/record (8 bits/byte)	Storage temperature without tape . . . -40° to 75°C (-40° to 167° F)
Batteries . . . . . four-cell, 4.4 to 6 volt, quick-charge, nickel-cadmium battery pack	Formatted capacity 512 records (131,072 bytes)	<b>DIGITAL CASSETTE</b>
Pack recharging time . . . . . 14 to 16 hours (Drive turned on or off)	Encoding method bi-phase/level-phase encoding	Type . . . . . Hewlett-Packard Mini-Data Cassette (HP 82176A)
Usage . . . . . ON—2 watts maximum (motor off)	<b>DRIVE MECHANISM</b>	Tape length . . . . . 24 m (80 ft)
ON—3.5 watts maximum (motor on)	Type . . . . . two-motor, hub drive	Temperature limits . . . . . 10° to 45°C (50° to 113°F)
STANDBY (on)—2.3 watts maximum (motor off)	Read/Write speed 23 centimeters (9 in) per sec	Humidity (tape storage) limits . . . . . 20% to 80% relative humidity
STANDBY (on)—3.8 watts maximum (motor on)	Search/Rewind speed . . . . . 76 centimeters (30 in) per sec	<b>SPECIAL MODES</b>
STANDBY (off)—0 watts maximum (motor off)	<b>INTERFACE</b>	Standby
	Type . . . . . HP-IL (Hewlett-Packard Interface Loop)	
	Default address on power up . . . . . undefined	
	Default address after auto address unconfigured . . . 2	



## HP 9114A Portable Disc Drive

Collect data with your HP-41 or HP-71 and store it with the HP 9114A Disc Drive. The drive is small enough to fit into a briefcase, yet each disc holds about as much information as you can pack into 175 pages of single-spaced, typed text.

This compact, portable drive provides 630K bytes (128K bytes using the HP-41\*) of information storage. It reads and writes double-sided, double-density format on 3½-inch flexible discs, and rotates at 600 RPM. The HP 9114A weighs about 5½ pounds.

The HP 9114A can be used with the HP-41, HP-71, and other Hewlett-Packard computers too, making it an integral part of a powerful information collection and manipulation system.

### Features

- Battery powered.
- Reads double-sided, double-density format on 3½" flexible discs.
- Hard discs.
- Discs have a hard center.
- Auto shutter contamination shield over read/write window.
- Media Monitor
- Weighs only 5½ lbs.

### Benefits

- Take it anywhere. Provides up to 12 hours of battery operation on a single charge.
- Keeps more information in a smaller amount of space.
- Prevent contamination from fingerprints, dust, and damage from handling.
- Provides precise head placement.
- Protects the disc from damage.
- Tracks the amount of life left in flexible discs and tells you, with a flashing light, when to replace them.
- Take it with you.

### Physical Specifications

**DIMENSIONS** . . . 7.8 cm (3.1 in) x 28.7 cm  
(11.5 in) x 20.0 cm (8.0 in)

**WEIGHT** . . . . . 2.68 kg (5.9 lbs)

#### POWER REQUIREMENTS

Batteries . . . . . 6 volt lead-acid dry cell  
(HP 88014A)

Recharging time . . 5 hours (80% capacity)  
16 hours (100% capacity)

Battery life  
(continuous  
use) . . . . . 40 minutes (100% duty  
cycle)  
8 hours (5% typical duty  
cycle)  
24 hours (standby)

Source . . . . . 90-120 Vac

Line frequency  
range . . . . . 48-66 Hz

Power consumption  
(max.) . . . . . 6W

#### OPERATING REQUIREMENTS

Operating  
temperature . . . 10° to 40°C (50° to 104°F)

Storage  
temperature . . . -40° to 60° C (-40° to  
140° F)

Humidity . . . . . 20% to 80%  
non-condensing

#### Storage

humidity . . . . . 8% to 80% (media)  
5% to 95% (drive)

#### Operating

altitude . . . . . 0 to 4572 m (0 to 15000 ft)

#### Storage

altitude . . . . . -304 to 15240 m (-1000  
to 50000 ft)

#### DATA FORMAT

Formatted  
capacity . . . . . HP-71: 630K bytes per unit  
HP-41: 128K bytes per  
unit\*

Sectors per track . . 16  
Tracks . . . . . 80 (3 spared) per surface

#### Recording

surfaces . . . . . 2 per disc  
Tracks . . . . . 135 per inch  
Transfer rate . . . . 5.5K bytes per second  
(max. sustained)

#### Average access

time . . . . . 485 msec (on)  
885 msec (off)

Rotation speed . . . 600 RPM

#### Recording

format . . . . . Double density

#### INTERFACE

Type . . . . . HP-IL (Hewlett-Packard  
Interface Loop)

\*HP-41 use requires Users' Library program 41-09114 for full 630K byte capacity.



## HP 82162A Thermal Printer/Plotter

The HP 82162A provides fast printouts with 24-character lines. It's battery-powered, so you can produce hard copy in the field.

This HP-IL compatible printer/plotter automatically centers and justifies text to the left or right. It has numeric upper- and lowercase alpha, double-wide characters, and intensity control for optimum contrast and readability. Additionally, it supports STANDBY mode that lets any HP-IL controller on the loop manage its power consumption.

### Features

- Battery powered.
- Automatic centering and left or right justification.
- 24 characters per line.
- Both single- and double-wide characters.
- 128-character set.
- STANDBY mode.

### Benefits

Take it anywhere.  
Provides formatting control; saves time.  
Makes smaller print possible.  
Allows highlighting of output.  
Allows more precise communication.  
HP-IL controller can turn printer on or off from remote location; conserves battery power.

### Physical Specifications

**DIMENSIONS** . . . 17.8 cm (7.0 in) x 13.2 cm (5.2 in) x 6.1 cm (2.4 in)

**WEIGHT** . . . . . 808 g (1.8 lbs) (includes paper and battery)

**CABLE LENGTH** . .86 cm (34 in)

#### POWER REQUIREMENTS

**Battery** . . . . . four-cell, 4.4 to 6 volt, quick-charge, nickel-cadmium battery pack

**Battery current,**  
(worst case) . . . 250 mA (idle), 5 A (printing)

**Recharging**  
**time** . . . . . 14 to 16 hours (printer/plotter ON or OFF)

**Operating time** . . .3 to 6 hours

#### CHARACTER SETS

96 standard ASCII  
127 modified-expanded ASCII

### SPECIAL MODES

Standby, Parse, HP Bar code, Column, Double wide, Single wide, 8-bit escape

### PRINT FORMAT

24 standard characters, 12 double-wide characters, 168 dot-columns per line  
Upper- and lowercase letters  
Special-character generation  
Plotting capabilities  
Graphics capabilities  
101-character buffer

### PRINTING

**SPEED** . . . . . 24 characters/sec

### OPERATING REQUIREMENTS

**Operating**  
**temperature** . . . 0° to 45°C (32° to 113°F)  
**Charging**  
**temperature** . . . 15° to 40° C (59° to 104° F)

### Storage

**temperature** . . . -40° to 55°C (-40° to 131° F)

**Humidity** . . . . . 10% to 90% (non-condensing) at 40° C

### THERMAL PAPER

**Width** . . . . . 5.7 cm (2.2 in)  
**Roll length** . . . . . 25 m (80 ft)  
**Colors** . . . . . blue, black  
6 rolls/box

### INTERFACE

**Type** . . . . . HP-IL (Hewlett-Packard Interface Loop)

**Startup conditions** . normal (inactive or active-listener, selected at power-on)

**Default address** . . undefined (normal startup) or 1 (active-listener startup)



## HP 2225B ThinkJet Printer

The battery-powered ThinkJet prints bidirectionally at 150 characters per second to produce 80-column pages quickly in the office or in the field. With sound registering under 50 decibels, printer noise need never interrupt your train of thought again.

An inexpensive, disposable cartridge holds the print head and ink reservoir, and is capable of printing approximately 500 full pages before replacement. Ink is delivered to the paper on demand, and dries immediately.

The 11 x 12 dot-matrix format text mode has a logic-seeking feature to find the fastest print route. Add a bold mode that won't slow printing speed to handle most of your letter-quality needs. A ROMAN8 character set provides 216 USASCII printable characters for use in many languages. Print on single sheets or fanfold paper.

### Features

- Quiet 150 cps printing.
- Battery-powered, compact, and lightweight.
- High quality text and graphics.
- Comprehensive print features:
  - four print pitches
  - underline and bold
  - printable control codes
- Disposable print head.
- Pin or friction feed.

### Benefits

- Quickly, quietly generate memos, graphics, reports, and spreadsheets.
- Hard copies on the spot, anywhere.
- Easy-to-read text and impressive graphics.
- Highlight and vary your output to meet text and graphics needs.
- Fast, clean print head replacement.
- Use continuous fanfold paper or cut sheets.

### Physical Specifications

**DIMENSIONS** . . . 8.9 cm (3.5 in) x 29.2 cm  
(11.5 in) x 20.6 cm (8.1 in)

**WEIGHT** . . . . . 2.5 kg (5.5 lbs)

#### INTERFACE

Type . . . . . HP-IL (Hewlett-Packard Interface Loop)

#### POWER REQUIREMENTS

Battery . . . . . 6 cell, 4.4 to 6 volt, quick-charge, nickel-cadmium battery pack (HP 82199A)

Battery current, (worst case) . . . . 20 mA (idle), 1.5 A (printing)

Recharging time . . . . . 14 hours approximately (Battery either in printer or out)

Operating time . . . over 200 typical pages

#### OPERATING REQUIREMENTS

Operating temperature . . . 10° to 40°C (50° to 104°F)

Storage temperature . . . -20° to 60°C (-4° to 140° F)

Relative humidity . . . . 10% to 90%

### PRINT FORMAT

Technique . . . . . Ink-jet dot matrix  
Speed . . . . . 150 characters/sec; bidirectional; logic-seeking in text mode

Text mode character cell structure . . . . 11 x 12 dot matrix  
Graphics mode resolution . . . . . 96 x 96 or 192 x 96 dots/in

Print Pitch (CPI)		Line Length (characters)
12.0 . . . .	Normal . . . . .	80
6.0 . . . .	Expanded . . . . .	40
21.3 . . . .	Compressed . . . . .	142
	Expanded-Compressed . . . . .	71

Character Set . . . . . ROMAN8

Printhead life . . . . . 500 typical pages

### PAPER FEED

Pin feed  
Friction

### PRINT BUFFER

One kilobyte



## HP 7470A Opt. 003 Graphics Plotter

The HP 7470A Graphics Plotter uses a two-pen system to produce high-quality color charts and graphs. It works with paper or overhead transparency film for your professional presentations.

More than 40 HP-GL (Hewlett-Packard Graphics Language) instructions are built-in, letting you program the plotter with simple commands to perform a variety of complex operations, such as selecting pen velocity and defining your own characters. Text can be written in any direction, with or without slant, and in many sizes. Built-in symbol plotting and seven dashed-line fonts help you clarify complex relationships.

### Features

- High-quality graphics.
- 1000 points in a one-inch line (.001 in or .025 cm).
- Lines plotted up to 15 inches (38 cm) per second.
- Two built-in pen stalls; snap in additional pens as needed.
- Five internal character sets.

### Benefits

- Achieve more precise results.
- Fine resolution of lines and curves.
- Generate plots in minutes.
- Print with two or more colors.
- Eliminates need for software-generated characters.

### Physical Specifications

**DIMENSIONS** . . . 12.7 cm (5 in) x  
43.2 cm (17 in) x  
34.3 cm (13.5 in)

**WEIGHT** . . . . . 6.1 kg (13.5 lbs)

#### INTERFACE

Type . . . . . HP-IL (Hewlett-Packard Interface Loop)

#### POWER REQUIREMENTS

– 10%, +5%  
HP-IB Opt. 002  
HP-IL Opt. 003  
RS-232 Opt. 001  
100, 120, 220 and 240 Vac, switch  
selectable  
Frequency . . . . . 48/66 Hz  
Power  
consumption . . .25 watts maximum

#### OPERATING REQUIREMENTS

Operating  
temperature . . . .0° to 55°C (32° to 131°F)  
Storage  
temperature . . . .–40° to 75°C (–40° to  
167°F)

### PLOTTING AREA

Y-axis . . . . . 190 mm (7.5 in)  
X-axis . . . . . 273 mm (10.7 in)  
metric setting  
258 mm (10.2 in) English  
setting

### MEDIA SIZES

8½ x 11 in (ANSI A); 210 x 297 mm (ISO A4)

### RESOLUTION

Smallest addressable  
step size . . . . . .0.025 mm (0.001 in)

### REPEATABILITY

With a  
given pen . . . . .0.1 mm (0.004 in)  
From pen  
to pen . . . . .0.2 mm (0.008 in)

### PEN VELOCITY

Pen down . . . . .maximum—38.1 cm/sec  
(15 in/sec)  
programmable—1 to 38  
cm/sec in 1 cm/sec  
increments  
Pen up . . . . .50.8 cm/sec (20 in/sec)

### ACCELERATION

Approximately 2 Gs



## HP 82168A Acoustic Coupler (Modem)\*

Use the portable coupler to talk to computers over voice-quality telephone lines from remote locations. The 300-baud device meets the Bell 113 standard and can be used anywhere a conventional (G-type)\*\* telephone receiver is available.

The battery-powered device is compatible with HP-IL (Hewlett-Packard Interface Loop). It can be turned on or off by a controller, or it automatically turns itself off after 10 minutes of inactivity. Mode changes are under software control, making communication easier.

The HP-41 Extended I/O Module, an HP-41 and HP 82168A Acoustic Coupler are all that are necessary for HP-41 operation of this battery-powered modem.

For additional data communications information, see the HP 82164A RS-232C Interface.

### Features

- Portable, carry in briefcase.
- Operates at 300 baud.
- Automatic power off.
- HP-IL command controlled.

### Benefits

- Can be used from any conventional (G-type) phone receiver. Send or receive data while away from the office.
- Compatible with most public and private data bases.
- Minimal power drain.
- Fully automatic operation.

### Physical Specifications

**DIMENSIONS** . . . 25.7 cm (10.1 in) x 9.7 cm  
(3.8 in) x 5.7 cm (2.2 in)

**WEIGHT** . . . . . 650 g (22.9 oz)

### POWER REQUIREMENTS

2.2 to 4.8 Vdc

Recharger

Input . . . . . .90 to 120 Vac, 50 to 60  
Hz, 7 watts

Output . . . . . .8 Vac, 3 watts maximum

Power consumption . . .440 mW

### OPERATING REQUIREMENTS

Operating temperature . . . 0° to 45°C (32° to 113°F)

Charging temperature . . . 15° to 40° C (59° to 104° F)

Storage temperature . . . -40° to 65°C (-40° to 149° F)

### TELEPHONE INTERFACE

Data transmission rate . . . . . .300 baud

Input buffer capacity . . . . .40 bytes

Output buffer capacity . . . . .40 bytes

Compatibility . . . . .Bell-type 113 series coupler

Transmit frequencies (Hz) . . . . .1070, 1270 (originate mode)

Receive frequencies (Hz) . . . . .1070, 1270 (originate mode)

Frequency stability control . . . . .crystal (parallel)

Receiver sensitivity . . . . .-45 dBm (nominal)

Transmit level . . . . .-15 dBm (nominal)

Modulation . . . . .Frequency Shift Keyed (FSK)

Carrier detect delay . . . . .1.5 sec (average)

### CONTROL PROTOCOLS

ENQ/ACK

XON/XOFF

NONE

\*In Europe, order part number: HP 92205K - Belgium; HP 92205L - UK; HP 92205M - Germany; HP 92205P - France; HP 92205N - Others.

\*\*U.S. only.



# Hewlett-Packard HP-IL Interfaces And Instruments

## HP-IL Interfaces

### HP 82164A HP-IL/RS-232C Interface

The HP 82164A RS-232C Interface translates HP-IL signals into RS-232C signals and vice versa. It is designed to allow the interconnection of HP-IL systems with RS-232C devices. The interface operates in an asynchronous mode providing 5-, 6-, 7-, or 8-bit data formats with one or two stop bits and odd, even, zero, one, and no parity modes. A configuration control block allows the user to change the signals at the connector from a terminal (DTE) configuration to a modem (DCE) configuration so a host computer can be emulated.

### HP 82169A HP-IL/HP-IB Interface

The HP 82169A expands HP-41 and HP-71 control and communication capabilities by linking low-cost HP-IL (Hewlett-Packard Interface Loop) systems with high-performance HP-IB (IEEE 488) computers and lab equipment. It puts a variety of peripherals, instruments, and computers at your disposal, including more than 120 HP-IB-compatible devices made by HP and many more offered by other manufacturers.

With the HP-IB interface, you can operate HP-IB versions of the HP 82905B printer and the HP 7470A plotter; operate and control power supplies and instruments such as the HP 1980 oscilloscope; and talk directly

with HP-IB computers such as HP Series 80, 100, 200, even the HP 1000 and 3000.

### HP 82938A HP-IL/Series 80 Interface

With the HP 82938A, a Series 80 computer can act as a system controller or device in an HP-41 or HP-71 HP-IL system. You can take advantage of Series 80 graphics capabilities to display information from an HP-41 or HP-71 in easy-to-understand graphs and charts. Or, with Series 80 data communications products, you can pass information to larger computers.

### HP 82165A HP-IL/GPIO Interface

Use your HP-IL system to control equipment operating with parallel bus structures. The GPIO interface contains the port buffering and a built-in power supply that operates from an HP standard AC adapter which is supplied with the interface. Interface to computers for data collection, to specialized devices in production or lab environments, and to other devices.

### HP 92198A Mountain Computer HP-IL 80-Column Video Interface

You can use this interface to display data and listings from an HP-41 or HP-71 HP-IL system on a standard video monitor. Add an RF modulator and use it with a conventional TV set. View your word processing and other applications in 24 row by 80 column

format, or choose 20 rows by 40 columns. Characters can also be displayed in inverse video (dark characters on a light background).

### HP 82166C HP-IL Interface Kit\*

The HP-IL Interface Kit provides the special components necessary for building HP-IL into your product. Three components are key to implementing the HP-IL interface standard: the HP-IL integrated circuits, the HP-IL transformer set, and the HP-IL panel receptacle. Included are complete component-level documentation, four complete sets of parts for prototype evaluation, and HP-IL development software for use on HP-41 and HP-71 systems. Components may be purchased individually when design is completed.

## HP-IL Instruments

A variety of instruments for use with both the HP-41 and HP-71 are available from your local HP sales office.

- HP 1630A/D/G Logic Analyzers
- HP 3421A Data Acquisition Control Unit
- HP 3468A Digital Multimeter
- HP 4945A Transmission Impairment Measuring Set (TIMS)
- HP 5006A (Opt. 030) Signature Analyzer
- HP 5384A/5385A (Opt. 003) Frequency Counters

\*Not available at retail outlets. To order an HP 82166C HP-IL Interface Kit, contact your local HP sales office.



# Hewlett-Packard Software

## Overview

A broad range of software is available to help you become instantly more productive. Choose from Application Pacs with plug-in modules and detailed manuals, Users' Library Solutions Books with keystroke listings, and member-contributed Users' Library programs.

### Run Thousands of HP-41 Programs on The HP-71

Now you can run approximately 90% of the HP-41 Users' Library programs and most Solutions Books, unchanged, on the HP-71.

It's easy, using the HP 82490A Translator Pac! This plug-in ROM module for the HP-71 Handheld Computer is designed to produce numerical and alpha prompts, results, and displays which are nearly identical to the HP-41's. When differences occur, they reflect the increased capabilities of the HP-71. If you're already familiar with the HP-41, you'll adjust easily to the HP-71 system — and the manual contains a special appendix for non-HP-41 users who want to run HP-41 programs.

The HP 82490A Translator Pac includes the complete HP-41CV/CX programmable function set, all of the character printing functions for the HP 82143A Thermal Printer, plus alpha register, flag, and conditional functions from the HP-41CX. The Pac also can be extended through user-defined functions.

The HP-41CX time, alarm, stopwatch, and extended memory functions are not built into the module. Therefore, Users' Library programs and Solutions Books that use these functions cannot be translated.

Enter and edit HP-41 programs directly from the HP-71 keyboard, magnetic cards, mini data cassettes, or 3½" HP-IL discs. Or, if you have HP-IL modules for both machines, you can transfer programs automatically from the HP-41 to the HP-71. With the Translator Pac, you can also use the HP-71 as an RPN calculator, with even more powerful features than the HP-41 itself.

### Application Pacs and Solutions Books

Hewlett-Packard offers a wide range of software packages as Application Pacs and Solutions Books to increase the versatility of your HP-41 and HP-71.

*Application Pacs* come with comprehensive manuals, plug-in application modules, and when applicable, prerecorded magnetic cards, keyboard overlays, and quick reference card.

*Solutions Books* come with complete documentation and keystroke listings. Magnetic cards, 3½" discs, and mini data cassettes are also available. HP-41 Solutions Books come with printed bar code.

## Users' Library Software

The Users' Library is another source of software solutions for HP-41 and HP-71 owners.

Thousands of member-contributed programs are available for use on the HP-41 — and now with the HP 82490A Translator Pac, most of these programs (plus Solutions Books) can be run on the HP-71. See the Software Overview section for details. For specific information about which programs can be translated, see the Users' Library Software Catalog.

Library members enthusiastically contribute programs spanning such applications as real estate, navigation, medicine, and mechanical engineering.

Each program is reviewed by the Library's technical staff and comes with complete documentation, to give you ready-to-go solutions. You can expect detailed program descriptions, warnings, or limits; sample problems and examples as appropriate; instructions on running the program; and step-by-step listings of program keystrokes. (HP-41 program documentation includes HP bar code.) You can also purchase Library programs on pre-recorded magnetic cards, mini data cassettes, or 3½" discs.

When you subscribe to the Library, you will receive the appropriate software catalog, two HP Solutions Books\* of your choice, and notification of special discounts and promotions.

For more information about Library solutions, contact:

Users' Library, Dept. 39UL  
1000 N.E. Circle Blvd.  
Corvallis, OR 97330

## HP-71 Software Distribution Center

Hewlett-Packard encourages the development of HP-71 software for custom applications. In fact, HP will help distribute software developed by Independent Software Vendors (ISVs).

For more information about the Software Distribution Center, contact:

HP-71 Software  
Distribution Center, Dept. 39UL  
1000 N.E. Circle Blvd.  
Corvallis, OR 97330

\*Offer excludes HP-41 Structural Design.



# HP-41/HP-71 Software

## HP-41 Software

### SCIENTIFIC AND ENGINEERING APPLICATIONS

#### HP-41 Application Pacs

##### HP-41 Advantage (00041-15055)

- Comprehensive Advanced Matrix Math
- Real and Complex Matrix Operations
- Simultaneous Equations On Real and Complex Numbers
- Numerical Integration and Differential Equations
- Three-dimensional Vector Operations
- Complex Number Operations
- Number Base Conversions and Boolean Logic
- Curve Fitting
- Roots and Evaluation of Polynomial Equations
- Coordinate Transformations
- HP-12C-style Time Value of Money
- User-accessible Subroutines

##### Aviation

(00041-15018)

(For pre-flight use.)

- Flight Management
- General Aircraft Weight and Balance
- Flight Plan
- Determining In-Flight Winds
- Position by One or Two VORS
- Mach Number and True Airspeed

##### Circuit Analysis (00041-15006)

- General Network Analysis
- Ladder Network Analysis

##### Clinical Lab and Nuclear Medicine (00041-15024)

- Beer's Law
- Body Surface Area
- Creatinine Clearance
- Blood Acid-Base Status
- Oxygen Saturation and Content
- Red Cell Indices

- Total Blood Volume
- Thyroid Uptake
- Radioactive Decay Correction
- Radioimmunoassay
- Basic Statistics
- Chi-Square Evaluation and Distribution
- t Statistics
- t Distribution

##### Machine Design (00041-15020)

- Circular Cams
- Generation of a Four Bar Linkage
- Progression of Four Bar System
- Progression of Slider Crank
- Gear Forces
- Standard External Involute Spur Gears
- Helical Spring Design
- Force Oscillator with Arbitrary Function
- Coordinate Transformation
- Points on a Circle
- Circle by Three Points
- Unit Conversions

##### Math/Statistics (00041-15049)

- Matrix Operations
- Solution to  $f(x) = 0$  on an Interval
- Polynomial Solutions/Evaluation
- Numerical Integration
- Differential Equations
- Fourier Series
- Complex Operations
- Hyperbolics
- Triangle Solutions
- Coordinate Transformations
- Basic Statistics for Two Variables
- Moments, Skewness and Kurtosis
- Analysis of Variance (One Way)
- Analysis of Variance (Two Way)
- Analysis of Covariance (One Way)
- Curve Fitting (Linear, Exponential, Logarithmic and Power Curve)
- Multiple Linear Regression
- Polynomial Regression
- t Statistics
- Chi-Square Evaluation
- Contingency Table
- Spearman's Rank Correlation Coefficient
- Normal and Inverse Normal Distribution
- Chi-Square Distribution

##### Navigation (00041-15017)

- Great-Circle Course and Distance
- Great-Circle Position
- Rhumb-Line Course and Distance
- Rhumb-Line Position
- Great-Circle Plotting and Voyage Planning
- Dead Reckoning
- Sight Reduction
- Perpetual Almanac—Stars, Sun, Planets, Moon
- Almanac Interpolator
- Sight Reduction Table
- Calendar Functions
- Greenwich Sidereal Time
- Star Almanac
- Fundamental Arguments
- Astronomical Coordinate Conversion
- Longitude to Latitude
- Input/Output Routines

##### Petroleum Fluids Pac (00041-15039)

- Z Factor
  - Gas Isothermal Compressibility
  - Gas Formation Volume Factor
  - Gas Viscosity
  - Pseudocritical Temperature and Pressure From Gas Gravity
  - Gas Properties From Composition
  - Oil Isothermal Compressibility
  - Oil Formation Volume Factor
  - Oil Viscosity
  - Gas-Oil Ratio
  - Bubble Point Pressure
  - Two-Phase Formation Volume Factor
  - Water Isothermal Compressibility
  - Water Formation Volume Factor
  - Water Viscosity
  - Gas-Water Ratio
  - Rock Compressibility
  - Total Isothermal Compressibility
- Includes unit management systems sub-routines.

##### Standard Applications Module (00041-15001)

- RPN Primer
- Calendar Functions
- Word Guessing Game
- Arithmetic Teacher
- Hexidecimal-Decimal Converter

- Financial Calculations
- Root Finder
- Curve Fitting
- Vector Operations
- Blackjack

##### Stress Analysis for Mechanical Engineers (00041-15027)

- Section Properties
- Beams
- Simply Supported Continuous Beams
- Columns
- Mohr Circle Analysis
- Strain Gage Data Reduction
- Soderberg's Equation for Fatigue
- RPN Vector Calculator

##### Structural Analysis for Civil Engineers (00041-15021)

- Section Properties
- Beams
- Simply Supported Continuous Beams
- Settling of Continuous Beams
- Continuous Frame Analysis
- Steel Column Formula
- RPN Vector Calculator
- Reinforced Concrete Beams
- Reinforced Concrete Columns
- Effective Moment of Inertia for Concrete Sections

##### Surveying

(00041-15005)

- Traverse, Inverse and Side Shots
- Compass Rule Adjustment
- Transit Rule Adjustment
- Intersections
- Curve Solutions
- Horizontal Curve Layout
- Vertical Curves and Grades
- Resection
- Predetermined Area
- Volume by Average End Area
- Volume of a Borrow Pit
- Coordinate Transformation

##### Thermal and Transport Science (00041-15019)

- Equations of State
- Polytropic Processes for Ideal Gas
- Isentropic Flow for Ideal Gases

- Conduit Flow
  - Energy Equation for Steady Flow
  - Heat Exchangers
  - Black Body Thermal Radiation
- Includes unit management system sub-routines.

#### HP-41 Solutions Books

- Antennas (00041-90093)
- Chemical Engineering (00041-90100)††
- Chemistry (00041-90102)††
- Civil Engineering (00041-90089)
- Control Systems (00041-90092)
- Electrical Engineering (00041-90088)
- Fluid Dynamics & Hydraulics (00041-90139)
- Geometry (00041-90084)
- Heating, Ventilating & Air Conditioning (00041-90140)
- High-Level Math (00041-90083)
- Mechanical Engineering (00041-90090)
- Optometry I (General) (00041-90143)
- Optometry II (Contact Lens) (00041-90144)
- Physics (00041-90136)
- Solar Engineering (00041-90138)
- Structural Design (cas-sette based) (00041-90441)†
- Surveying (00041-90141)††
- Test Statistics (00041-90082)
- Time Module Solutions I (00041-90395)†

#### BUSINESS APPLICATIONS

##### HP-41 Application Pacs

##### Financial Decisions (00041-15004)

- Compound Interest Solutions
- Internal Rate of Return
- Modified Internal Rate of Return (FMRR)
- Net Present Value
- Loan Amortization Schedules
- Depreciation Schedules

- Bond Price and Yield
- Days Between Dates

##### Home Management (00041-15023)

- Home Budgeting
- Travel Expense Record
- Stock Portfolio Evaluation
- Checking Account Reconciliation
- Your Financial Calculator
- Accumulated Interest and Remaining Balance
- Home Owner's Equity Analysis
- The Rent or Buy Decision
- Tax Free Individual Retirement Account (IRA) or Keogh Planing
- The True Cost of an Insurance Policy

##### Mathematics

(00041-15003)

(See Scientific and Engineering Applications)

##### Real Estate

(00041-15016)

- Compound Interest and Loan Amortization
- Internal Rate of Return
- Modified Internal Rate of Return
- Net Present Value
- Depreciation Schedules
- Income Property Analysis
- Graduated Payment Mortgage
- Wrap-Around Mortgage
- Home Owner's Equity Analysis
- The Rent or Buy Decision
- Price and Yield of a Mortgage Traded at a Discount/Premium
- APR of a Loan With Fees
- Present Value of an Increasing/Decreasing Annuity

##### Securities (00041-15026)

- Bond/Note Price and Yield
- Routines for Option Writers Using the Black-Scholes Evaluation Method
- Warranty and Option Hedging



- Yield on Call Option Sales
- Butterfly Options
- Bull Spread Option Strategy
- Convertible Bond Investment Analysis
- Stock Portfolio Valuation
- Bond Speculation Using Margin
- Convertible Security Analysis

**Standard Applications Module (00041-15001)**  
(See Scientific and Engineering Applications)

**Statistics (00041-15002)**  
(See Scientific and Engineering Applications)

### HP-41 Solutions Books

- Business Statistics/Marketing Sales (00041-90094)††
- Calendars (00041-90145)††
- Home Construction Estimating (00041-90096)
- Lending, Savings & Leasing (00041-90086)
- Real Estate (00041-90136)
- Small Business (00041-90137)††
- 1984 Taxes (00041-90543)

## ENTERTAINMENT

### HP-41 Application Pacs

**Games (00041-15022)**

- Submarine Hunt
- Space War
- Super Bagels
- Hangman

\*AMPI™ Statistics is a trademark of American Micro Products, Inc.

†This Solutions Book is not translatable by the HP 82490A Translator Pac.

††One or more of the programs in this Solutions Book are not translatable by the HP 82490A Translator Pac. Some of these programs require the HP-41 Card Reader.

For HP-71 Development System software and Internal Design Specifications Documents, see page 16.

- Pinball
- Craps
- Biorhythms
- Random Number Generator

**HP-41 Solutions Books (82490A)**

- Games I (00041-90099)
- Games II (00041-90443)††

## HP-71 Software

### GENERAL

### HP-71 Application Pacs

**HP-41 Translator (82490A)**

- Run thousands of HP-41 programs on the HP-71
- RPN calculator capability on HP-71
- Emulator system with 147 HP-41 functions built in
- HP-71 Text Editor program
- TRANS41 translating program
- READ41 for automatic program transfer
- KEYS 41 key file
- 13 BASIC keywords for access to FORTH and HP-41 systems, and HP-71 text files
- Built-in HP-71 FORTH language system

## SCIENTIFIC AND ENGINEERING APPLICATIONS

### HP-71 Application Pacs

**AC Steady State Circuit Analysis (82481A)**

- Construct and analyze circuit models using: Resistors Capacitors Inductors Transmission lines Voltage controlled current sources Open or shorted stubs
- Print or display AC voltage gain, phase and group delay at any node in circuit at any frequency using linear or logarithmic frequency instruments
- Simulate and analyze circuits such as: Passive filters Active filters Operational amplifiers Transistor amplifiers
- Solve a circuit with up to 72 branches and 24 nodes (three memory modules required)

**Curve Fitting (82484A)**

- Fit a general (and possibly non-linear) model function with up to 20 unknowns
- Determine local minima or maxima to a general real valued function with up to 20 variables
- Matrix editor
- Built-in library of 84 possible model functions: 46 general models Polynomials up to degree 19 Linear models up to order 19
- Direct-execution menus
- Call user-written model and provide gradient approximation automatically

**Data Communications (82488A)**

- Send incoming and outgoing data to HP-71 LCD, printer, and/or video interface
- Transfer text files to host computer
- Store incoming data into a text file
- 500 character input buffer
- Code-word creation capability
- Command files
- Access most operations with a single key

**FORTH/Assembler (82441A)** (See HP-71 Development System section on page 16.)

**Math (82480A)**

- Real and complex math operations: Inversion System solution Transpose Conjugate transpose Determinant Arithmetic Norms Inner product
- Numeric functions: Hyperbolics and inverses GAMMA function IEEE NEIGHBOR Scaling functions
- Base conversions: Binary, octal, decimal, hexadecimal
- Implicit and explicit redimensioning of arrays
- Solve
- Integrate
- Finite Fourier Transform

**AMPI™ Statistics (82489A)\***

- Means and Moments
- Histogram
- Multiple Linear Regression
- Paired t-Test
- Unpaired t-Test
- One-way ANOVA
- Two-way ANOVA

- Contingency Table
- Mann-Whitney U. Test
- Kruskal-Wallis Test
- Student's t-Distribution
- F-Distribution
- Chi-Square Distribution
- Normal Distribution
- Weibull-Distribution
- Exponential Distribution
- Binomial Distribution
- Poisson Distribution

**Surveying (82483A)**

- File management routines: Assign List coordinates Clear coordinates Duplicate points Balance traverse and adjustment Rotate points Translate points Scale coordinates
- Coordinate geometry routines: Start Lines Curves Radial stakeout Area/traverse computations
- Store up to 550 points without additional memory

## HP-71

### Solutions Books

- General Utilities (basic subprograms) (00071-90066)
- Math (00071-90064)
- Software Development Utility (82440A)

## BUSINESS APPLICATIONS

## HP-71

### Application Pacs

**Curve Fitting (82484A)** (See Scientific and Engineering Applications)

**Data Communications (82488A)** (See Scientific and Engineering Applications)

**Finance (82482A)**

- Time value of money calculations: n, i, PV, PMT, FV
- Uneven cash flow analysis: NPV, IRR
- Amortization schedules
- Depreciation: ACRS Straight line Declining balance Sum-of-year digits
- HELP file

**Math (82480A)** (See Scientific and Engineering Applications)

**Text Editor (82485A)**

- Format text output: Text input and output Fill and justify lines Copy and center lines Test for end of page Start paragraphs Set margins Page length Line spacing Skipping lines Page number Merge files Use distribution list
- Insert formats: Text, Exit, List, Print, Copy, Move, Delete, Search, Replace
- HELP file
- Simple memo, letter and report generation

## HP-71

### Solutions Books

- General Utilities (basic subprograms) (00071-90066)
- Math (00071-90064)

## ENTERTAINMENT

**HP-71 Solutions Book**

- Games (00071-90065)



# Hewlett-Packard

## HP-41/HP-71 Custom Products

HP's successful Custom Products Program combines customer-generated software and powerful HP-41 and HP-71 advanced computational products.

Custom Products offer a personal, tailor-made approach to traditional problems. If your organization has groups of people who perform identical jobs, you may be able to save time and money, as well as improve productivity with customized products.

Independent Custom Consultants (ICCs) are trained experts who can provide you with the level of service you require, whether it's to have your own software made into a Custom Product, or comprehensive consultation. Then, the ICC will arrange with the HP factory to have your Custom Products manufac-

tured. For more information see the Custom Products brochure and ICC Capabilities Guide.

There are several options from which to choose, and all are designed to tailor a problem-solving system to your professional demands. Use Custom Software Modules and Custom Magnetic Cards for program storage; HP-41 users can choose Custom Bar Code, too. Custom Keyboard Overlays and HP-41 Custom Keyboard Touchpads personalize your keyboard to make data entry and program execution faster and easier.

Up to four Custom Software Modules, available in the following byte capacities, may be used at a time:

HP-41	HP-71
4K	16K
8K	32K
	48K
	64K

The right custom option puts power and portability to work for you, swiftly transforming questions into answers and problems into solutions.

For more information on Custom Products, contact your local HP sales office.



# HP-41/HP-71 Features and Functions Comparison Chart

Use this Comparison Chart to choose the HP Advanced Computational product that best meets your needs.



	HP-41CV	HP-41CX	HP-71B
<b>Memory</b>			
Built-in operating system ROM (bytes) . . . . .	12,000	24,000	64,000
Built-in memory (bytes)* . . . . .	2,233	2,233	17,500
Built-in extended memory (bytes)* . . . . .		868	
Maximum extended memory (bytes)* . . . . .	4,200	4,200	
Maximum additional main memory . . . . .			16,384
Maximum memory (bytes)* . . . . .	6,433	6,433	33,500
Maximum expandable memory (bytes)*† . . . . .	6,433	6,433	458,200
Alpha/display/keyboard . . . . .	■	■	■
Audible tones . . . . .	■	■	■
Calendar functions . . . . .	S	■	■
Clock . . . . .	S	■	■
Last entry (command stack) . . . . .			5/S
Stopwatch, alarms . . . . .	S	■	■
Redefinable keyboard . . . . .	■	■	■
Text-file editor . . . . .		■	S
<b>Programming Features</b>			
BASIC language . . . . .		■	■
RPN logic system . . . . .	■	■	S
Algebraic operating system (CALC mode) . . . . .			■
FORTH/Assembly languages . . . . .			S
Program labels . . . . .	■	■	■
Numeric program labels . . . . .	100	100	not applicable
Start-up command sequence . . . . .	S	S	■
Subprograms . . . . .			■
Redefined keys†† . . . . .	68	68	159
User-defined functions . . . . .	■	■	■
Conditional tests . . . . .	14	20	20+
Flags . . . . .	56	56	128
String manipulation . . . . .	■	■	■
Recursion . . . . .	■	■	■
Indexed looping . . . . .	■	■	■
Indirect parameter specification . . . . .	■	■	■
Insert/Delete editing . . . . .	■	■	■
Levels of subroutines . . . . .	6	6	limited only by available RAM
Multiple file structure . . . . .		■	■
<b>Business Features</b>			
Amortization . . . . .	S	S	S
Beginning/end of period selection . . . . .	S	S	S
Bond: yield-to-maturity price . . . . .	S	S	S
Depreciation (SL, DB, and SOYD) . . . . .	S	S	S
Net present value (NPV) and internal rate of return (IRR) . . . . .	S	S	S

	HP-41CV	HP-41CX	HP-71B
<b>Scientific Features</b>			
Boolean operators (NOT, OR, AND, XOR) . . . . .	S	S	■
Complex functions . . . . .	S	S	S
Decimal angle ↔ angle in degrees (hrs/min/sec) . . . . .	■	■	S
Degrees ↔ radians . . . . .	■	■	■
Engineering notation . . . . .	■	■	■
Finite Fourier Transform . . . . .	S	S	S
Hyperbolics and inverses . . . . .	S	S	S
IEEE Floating Point Math Standard . . . . .			■
Integrate (numerical integration) . . . . .	S	S	S
Math exceptions . . . . .			■
Matrix variables (arrays) . . . . .			S
Matrix operations . . . . .	S	S	S
Number base arithmetic (binary, octal, decimal, hexadecimal) . . . . .	S	S	S
Number of display digits (mantissa/exponent) . . . . .	10/2	10/2	12/3
Rectangular ↔ polar coordinates . . . . .	■	■	■
Scientific notation . . . . .	■	■	■
Solve (root finder) . . . . .	S	S	S
Trigonometric functions . . . . .	■	■	■
<b>Statistical Features</b>			
Correlation coefficient . . . . .	S	S	■
Factorial function . . . . .	■	■	■
Gamma function . . . . .	S	S	S
Linear regression or estimate . . . . .	S	S	■
Mean/standard deviation (number of variables) . . . . .	1 or 2	1 or 2	1 to 15
Percent . . . . .	■	■	■
Percent change . . . . .	■	■	■
Permutations and combinations . . . . .	S	S	■
Random number generator . . . . .	S	S	■
Weighted mean $\bar{n}$ , $\Sigma x$ , $\Sigma x^2$ , $\Sigma y$ , $\Sigma y^2$ , $\Sigma xy$ . . . . .	S	S	S
<b>General Arithmetic Features</b>			
Absolute value . . . . .	■	■	■
Decimal-hexadecimal conversions . . . . .	S	S	■
Storage register arithmetic: +, -, /, x, √x, 1/x, CHS . . . . .	■	■	■
Ln x, e <sup>x</sup> . . . . .	■	■	■
y <sup>x</sup> , Log x, 10 <sup>x</sup> , x <sup>2</sup> , π . . . . .	■	■	■

## KEY

■ Built-in feature or function

S Application Pacs, Solutions Books, and Users' Library Programs

\* HP-41: RAM — 8-bit bytes; ROM — 10-bit words


HP-71: RAM — 8-bit bytes; ROM — 8-bit bytes

† Figures indicate current capability of HP-41CV and HP-41CX, and potential capability of HP-71.

†† Redefinable keys (all shifted keys may be redefined): HP-41CV and HP-41CX — 34; HP-71 — 53



United States:  
Hewlett-Packard  
Handheld Products Operation  
1000 N.E. Circle Blvd.  
Corvallis, Oregon 97330



*Technical information covered in this brochure is subject to change without notice.*

For additional information or a demonstration of Hewlett-Packard professional calculators and handheld computers, visit your nearest HP dealer. For the location and number of the dealer nearest you, call toll-free 1-800-FOR-HPPC (1-800-367-4772).

Canada:  
Hewlett-Packard (Canada) Ltd.  
6877 Goreway Drive  
Mississauga, Ontario  
L4V1M8

Europe, North Africa, Middle East:  
Hewlett-Packard S.A.  
150, Route du Nant-d' Avril  
P.O. Box CH-1217 Meyrin 2  
Geneva, Switzerland

Other countries:  
Hewlett-Packard Intercontinental  
3495 Deer Creek Road  
Palo Alto, California 94304  
U.S.A.

Hewlett-Packard Corporate Offices  
3000 Hanover Street  
Palo Alto, California 94304  
U.S.A.